

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
21 December 2000 (21.12.2000)

PCT

(10) International Publication Number  
**WO 00/76634 A1**

- (51) International Patent Classification<sup>7</sup>: B01D 53/22, 69/02, 71/70, 71/02, 67/00
- (21) International Application Number: PCT/US00/15778
- (22) International Filing Date: 9 June 2000 (09.06.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/138,581 11 June 1999 (11.06.1999) US
- (71) Applicant (for all designated States except US): GAS SEPARATION TECHNOLOGY, INC. [US/US]; Technology Park, Building 69, 136 Rochester Drive, Louisville, KY 40214 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SAMMONS, Jack [US/US]; 4223 Hopewell Road, Louisville, KY 40299 (US). GODDARD, David, M. [US/US]; 224 Ring Road, Louisville, KY 40207 (US).
- (74) Agent: CASTELLANO, John, A.; Birch, Stewart, Kolasch & Birch, LLP, P.O. Box 747, Falls Church, VA 22040-0747 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— With international search report.  
— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: POROUS GAS PERMEABLE MATERIAL FOR GAS SEPARATION

(57) Abstract: A gas separator, a method for producing the gas separator, and a method for separating gases based on a property of inelasticity of the gases. The inventive gas separator is a permeable porous material for separating a mixture of gases by selectable pore size exclusion, comprising pores formed with at least one nanostructured compound. In other words, the inventive porous material can be used to separate a mixture of gases based upon the different working diameter of each of the gases. By selecting specific nanostructured compounds, the porous material can be tailored to contain pores of a predetermined size which allow gases having a working diameter smaller than the size of the pores to pass through the material while preventing the passage of gases having a working diameter greater than the size of the pores.

WO 00/76634 A1

## Porous Gas Permeable Material for Gas Separation

### Background of the Invention

#### Field of the Invention

The present invention relates to a gas separator for gas separation, a method for preparing the gas separator, and a method of performing gas separation.

#### 5 Description of the Related Art

It has been determined that there are limits to the compressibility of gas molecules, a fact which is commonly known as the law of incompressibility of matter. Based on this law, it has further been found that gas molecules behave as if they have some minimum diameter, known as their "working diameter".

10 If it is desired to separate one species of gas from others, for any one of many reasons (e.g., enhanced combustion, gas recovery, pollution control, etc.), it has been realized for some time that the ideal separation mechanism would pass one gaseous component in a mixture, while rejecting all others in a continuous steady-state manner. Organic membrane materials allow the passage of only certain molecules, but this passage  
15 is typically controlled by a solution diffusion mechanism, which is too slow (partition coefficients allow flows of 2-3 l/ft<sup>2</sup>/day which are insufficient) a process for this approach to be used in many industrial gas separation applications. Other approaches have created "molecular sieves" that capture molecules based on their size or other physical or chemical properties. Such "sieves" are not truly sieves at all in the customary sense of the term,  
20 because no molecules pass through them. Rather, the trapped molecules must be "cleaned out" of these devices periodically by changes in temperature or pressure.

Previous methods to circumvent these drawbacks by the use of porous inorganic structures have focused on producing a porous material with holes in the size range of gas molecules. However, these methods have never attempted to create holes of a specific  
25 size, and for the specific purpose of separating two or more well-defined gases. Furthermore, there has been nothing in previous approaches that included the steps of first, selecting the hole size desired, and second, creating a porous material containing this hole size.

### Summary of the Invention

It is an object of this invention to provide a process for producing gas separation membranes having high selectivity achieved by having controlled pore sizes and narrow pore size distributions, and high permeance, defined as flux/pressure drop, achieved by  
5 having a large volume fraction porosity and a very thin selective layer.

It is yet another object of this invention to provide a process for producing gas separators using cage-like molecules to form pores. Since the size and concentration of the cage-like molecules are under the complete control of the Experimenter, the pore size and distribution of the gas separator can be tailored to separate virtually any mixture of gases  
10 in an efficient manner.

Working diameters of selected gas molecules are shown in Table 1. If the goal is, for example, to separate oxygen from nitrogen, one would need to create a porous structure, or true molecular sieve, containing holes greater than 3.5Å, but less than 3.6Å, in diameter. More correctly, the gas separator would require that one dimension of its  
15 holes be between these two numbers; the maximum dimension of the holes could be appreciably larger, because a gas molecule with a working diameter of 3.6Å, such as nitrogen, could not fit through any hole whose smaller dimension were smaller than this value. The ability to select hole sizes within a gas separator is a feature of this invention.

### Brief Description of the Drawings


- 20 Figure 1 illustrates a vinyl POSS monomer;  
Figure 2 illustrates a vinyl POSS prepolymer;  
Figure 3 illustrates a vinyl POSS polymer;  
Figure 4 illustrates examples of channels in three different crystal forms;  
Figure 5 illustrates a rolled thin film containing channels;  
25 Figures 6 and 7 illustrate a stacked thin film containing channels;  
Figure 8 illustrates close packed spheres; and  
Figure 9 illustrates deformed close packed spheres.

### Detailed Description of the Preferred Embodiments

The present invention, in part, is drawn to a permeable porous material for separating a mixture of gases by selectable pore size exclusion, comprising pores formed with at least one nanostructured compound. In other words, the inventive porous material  
5 can be used to separate a mixture of gases based upon the different working diameter of each of the gases. By selecting specific nanostructured compounds, the porous material can be tailored to contain pores of a predetermined size which allow gases having a working diameter smaller than the size of the pores to pass through the material while preventing the passage of gases having a working diameter greater than the size of the  
10 pores.

The nanostructured compound is optionally substituted with a reactive group and is selected from the group consisting of a polyhedral oligomeric silsesquioxane (POSS), zeolite, cyclomacroether, porphyrin, foldamer, cyclodextrin and mixtures thereof. Possible reactive substituents include alcohol, alkoxysilane, amine, chlorosilane, epoxide, ester,  
15 halide, methacrylate, molecular silica, nitrile, norbornene, olefin, phosphine, silane, silanol, styrene, and mixtures thereof. The reactive substituent may be bonded directly to the nanostructured compound or may be bonded through an organic, siloxane or organosiloxane group.


It is preferred that the nanostructured compound is a POSS derivative having a  
20 cage composed of silicon and oxygen, and having a molecular formula of:



wherein n is 4-36, 48 or 60, and R is a reactive substituent defined above which may be  
25 bonded directly to the silicon atoms forming the cage. Preferably n is 8, 10, 12 and/or 14. A description of possible cages is taught by Wichmann et al (Wichmann, D. et al. J. Phys. Chem. B, Vol. 103, pp. 10087-10091, 1999), which is incorporated herein by reference. Each of the cages taught by Wichmann et al can be further modified by attaching reactive substituents to the cage atoms.

30 Examples of POSS compounds include:

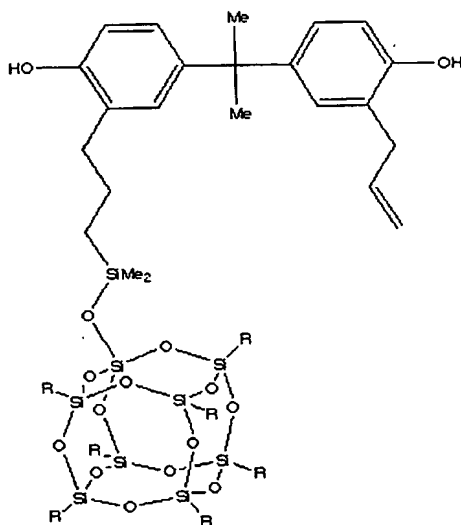
1-[3-(allylbisphenol A)propyldimethylsiloxy]-  
3,5,7,9,11,13,15heptacyclopentylpentacyclo-[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl


5

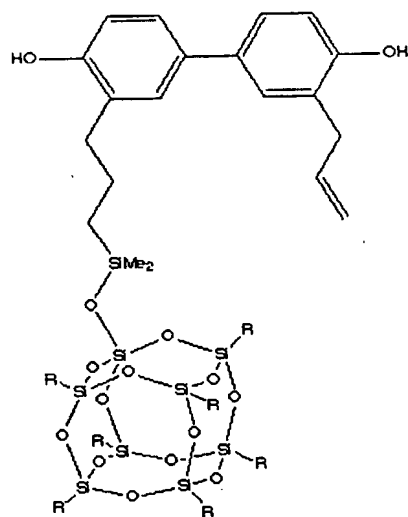1-[3-(allylbiphenol)propyldimethylsiloxy]-  
3,5,7,9,11,13,15heptacyclopentylpentacyclo-[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl

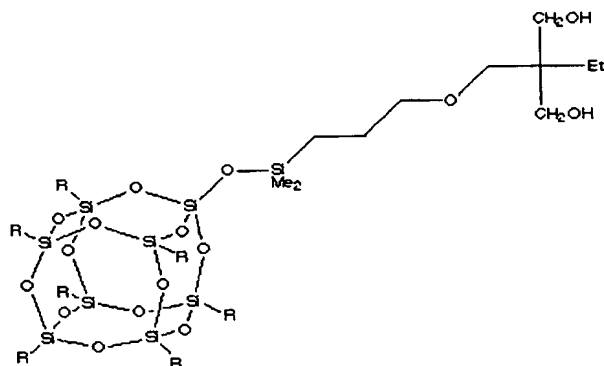
1-[3-(1,3-propanediol-2-ethyl-2-methoxy)propyl]dimethylsiloxy]-3,5,7,9,11,13,15-heptacyclopentylpentacyclo-[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;



R = cyclopentyl

5

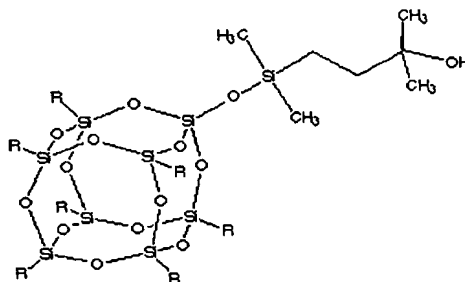
1-[(2-methyl,2-hydroxy)butyl]dimethylsiloxy]-3,5,7,9,11,13,15-heptacyclopentylpentacyclo-[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;



R = cyclopentyl

10

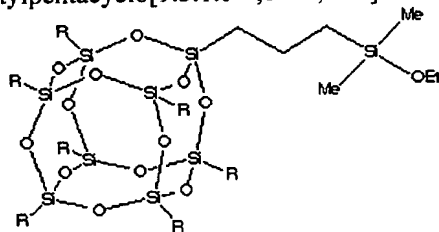
1-[3-(ethoxydimethylsilyl)propyl]-3,5,7,9,11,13,15-heptacyclopentylpentacyclo-[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;



R = cyclopentyl

15

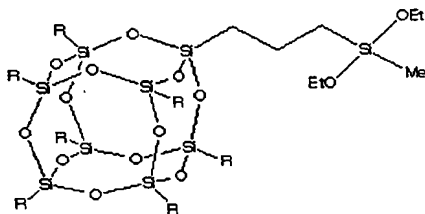
1-[2-(diethoxymethylsilyl)propyl]3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>,1<sup>15,15</sup>,1<sup>7,13</sup>]octasiloxane:



R = cyclopentyl

5

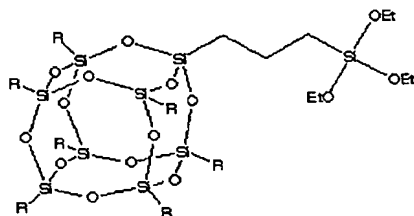
1-[3-(triethoxysilyl)propyl]3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>,1<sup>15,15</sup>,1<sup>7,13</sup>]octasiloxane;



R = cyclopentyl

10

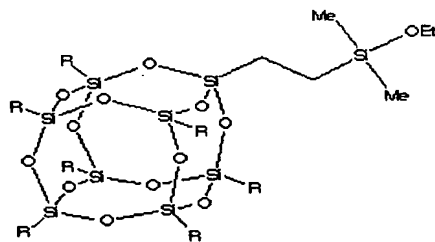
1-[2-(ethoxydimethylsilyl)ethyl]3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>,1<sup>15,15</sup>,1<sup>7,13</sup>]octasiloxane;



R = cyclopentyl

15

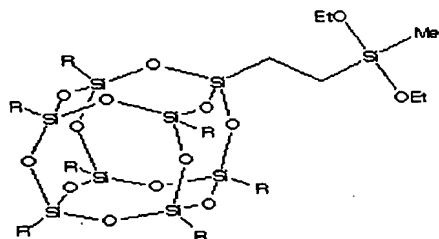
1-[2-(diethoxymethylsilyl)propyl]3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>,1<sup>15,15</sup>,1<sup>7,13</sup>]octasiloxane;



R = cyclopentyl

5

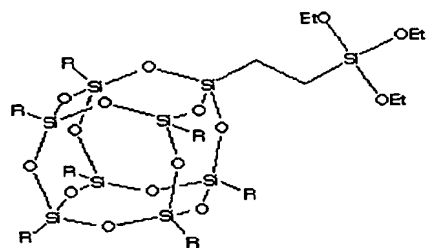1-[2-(triethoxysilyl)propyl]3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>,1<sup>15,15</sup>,1<sup>7,13</sup>]octasiloxane;




R = cyclopentyl


10




## POSS-BisPhenol A-urethanes;

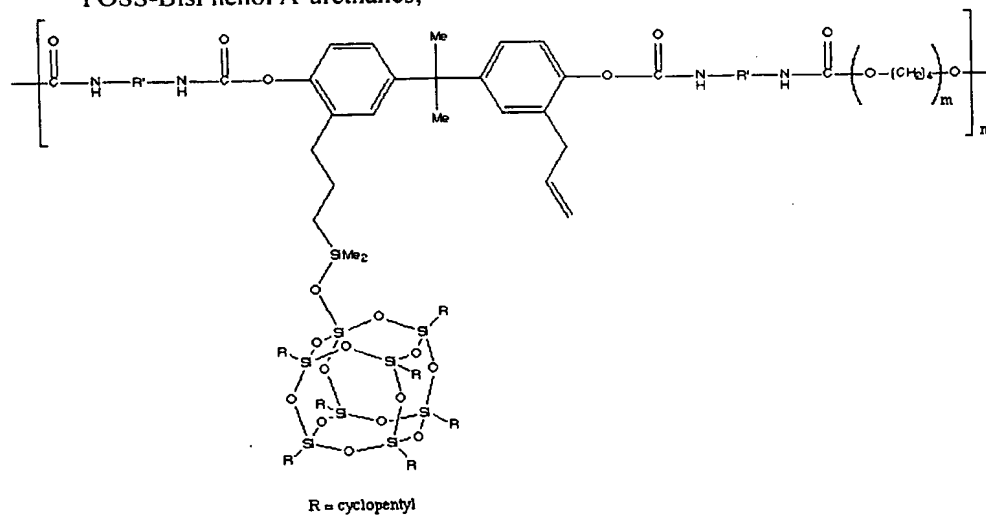

## 5 POSS-DiMethylol-urethanes;

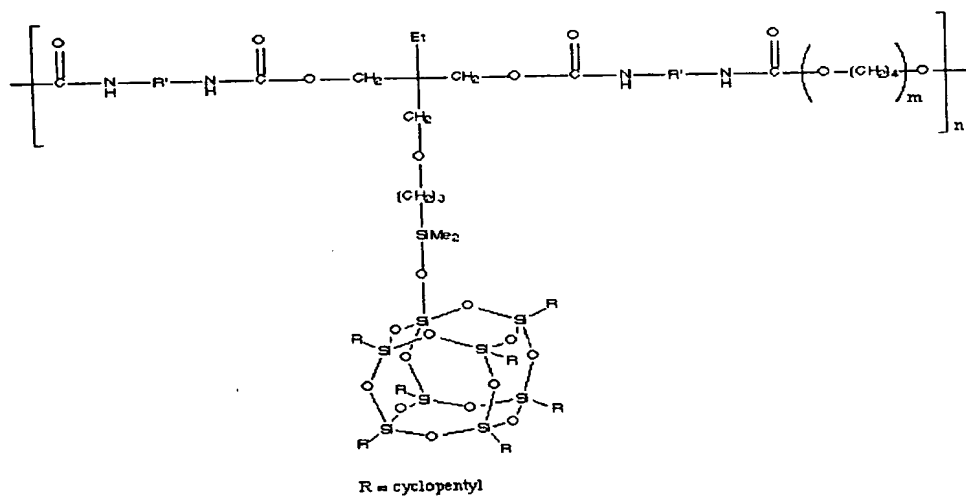


1-chloro-3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl

5

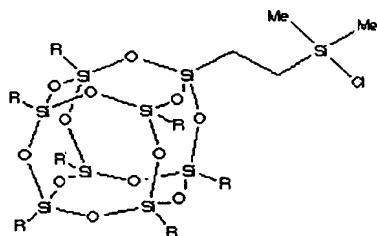
1-[2-(chlorodimethylsilyl)ethyl]-3,5,7,9,11,13,15heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl

10

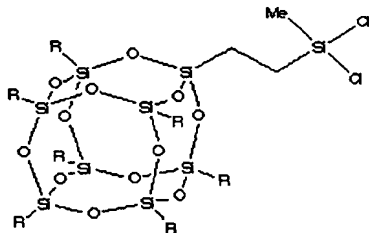
1-[2-(dichloromethylsilyl)ethyl]-3,5,7,9,11,13,15heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl

15

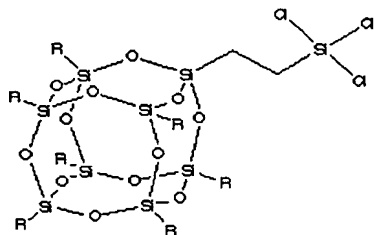
1-[2-(trichlorosilyl)ethyl]-3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl

5

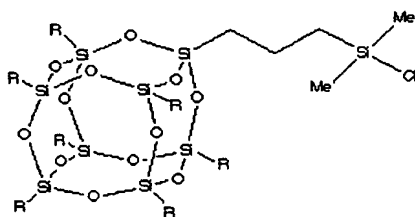
1-[3-(chlorodimethylsilyl)propyl]-3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]-octasiloxane;



R = cyclopentyl

10

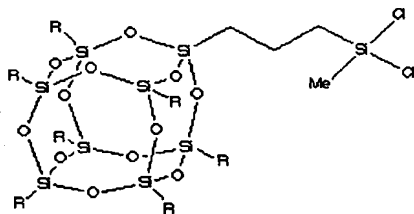
1-[3-(dichloromethylsilyl)propyl]-3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]-octasiloxane;



R = cyclopentyl

15

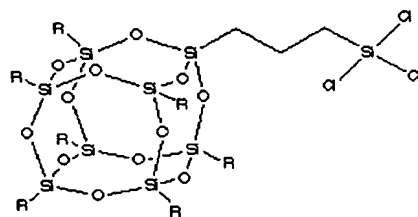
1-[3-(trichlorosilyl)propyl]-3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl


1,3,5,7,9,11,13,15-[2-(chlorodimethylsilyl)ethyl]pentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;

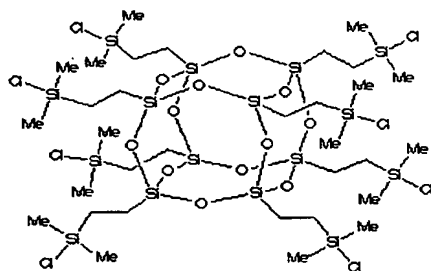5




1,3,5,7,9,11,13,15-[2-(chlorodimethylsilyl)ethyl]pentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;

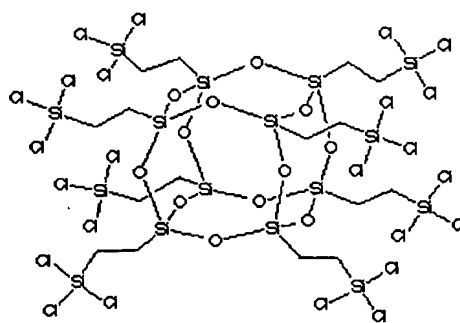10




1,3,5,7,9,11,13,15-[2-(dichlorodimethylsilyl)ethyl]pentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;

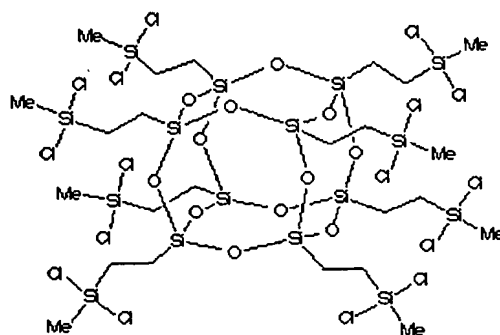15




1-[(2-epoxy)propyl]-3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl

5

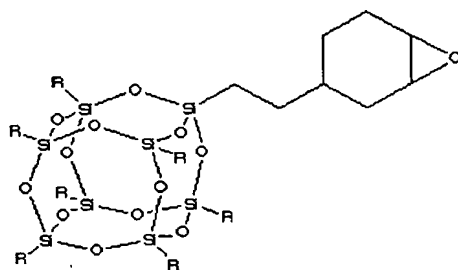
1-[2-(cyclohexyl-3-epoxy)ethyl]-3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]-octasiloxane;



R = cyclopentyl


10

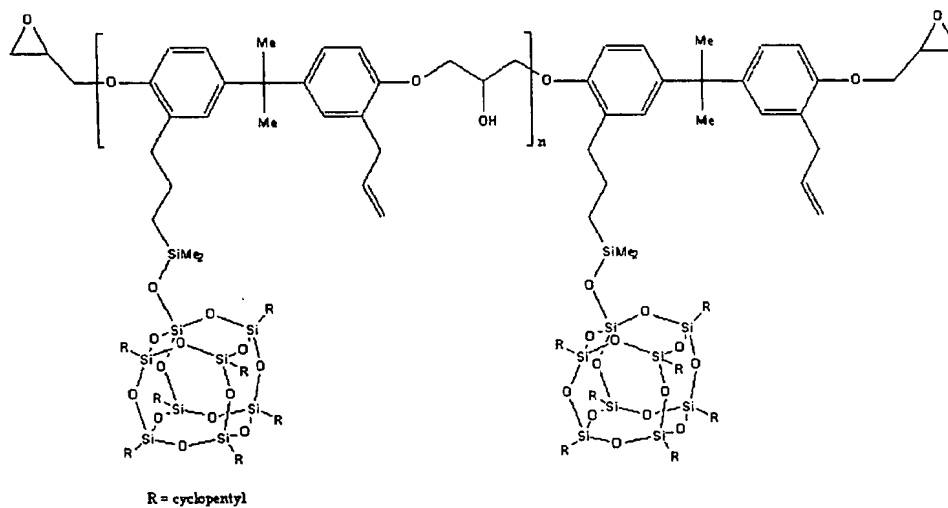POSS-diepoxy resins;




5

1,3,5,7,9-octavinyl-11,13,15-  
epoxyethylpentacyclo[9.5.1.1.<sup>3,9</sup>.1.<sup>15,15</sup>.1.<sup>17,13</sup>]octasiloxane;



10

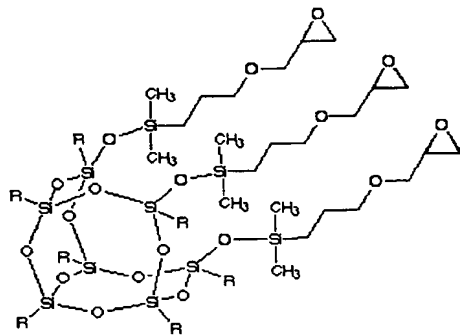
endo-3,7,14-tris[1-(3-dimethylsiloxy)propyloxy-2,3-epoxypropyl]-1,3,5,7,9,11,14,-  
heptacyclopentyltricyclo[7.3.3.1<sup>5,11</sup>]-heptasiloxane;



R = cyclopentyl

5

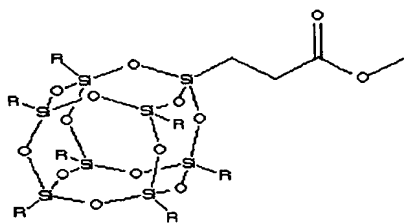
1-(methylpropionato)-3,5,7,9,11,13,15-heptacyclopentylpentacyclo  
[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]-octasiloxane;



R = cyclopentyl

10

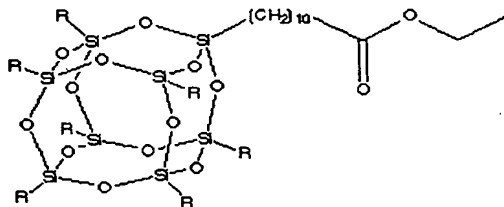1-(ethylundecanoato)-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]-octasiloxane;




R = cyclopentyl

15



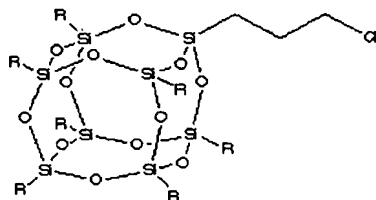
1-[(3-chloro)propyl]-3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl

5


1-[4-chlorophenyl]-3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl

10


1-[chlorobenzyl]-3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl

15

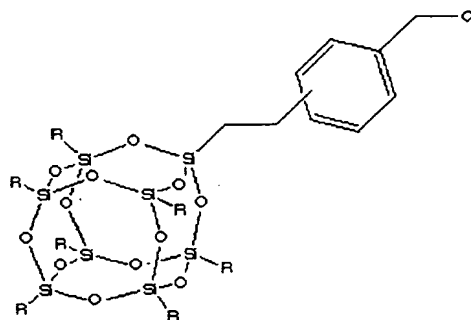
1-[2-(chlorobenzyl)ethyl]-3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl

5

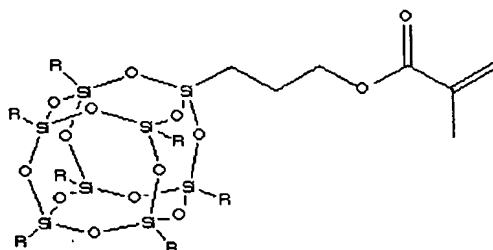
1-[3-(methacryl)propyl]-3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl

10

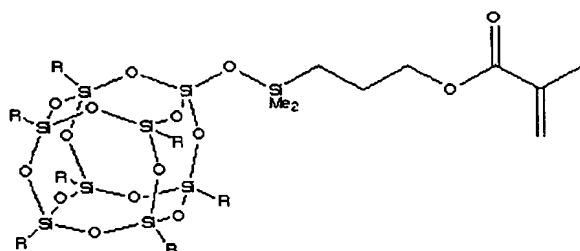
1-[3-(methacryl)propyldimethylsiloxy]-3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]-octasiloxane;



R = cyclopentyl

15

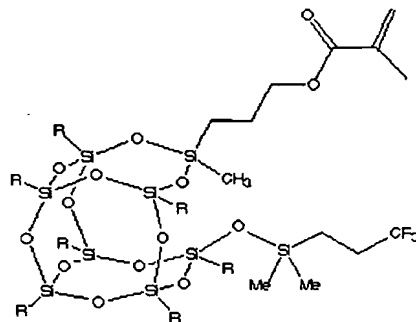1-(3,3,3-trifluoropropyldimethylsiloxy)-1,3,5,9,11,13,15-heptacyclopentyl-7-[3-(methacryl)propyl]-7-methyltetracyclo[9.5.1.1<sup>5,11</sup>.1<sup>9,15</sup>]octasiloxane;




5

R = cyclopentyl

1-(tridecafluoro-1,1,2,2-tetrahydrooctyldimethylsiloxy)-1,3,5,9,11,13,15-heptacyclopentyl-7-[3-(methacryl)propyl]-7-methyltetracyclo[9.5.1.1<sup>5,11</sup>.1<sup>9,15</sup>]octasiloxane;

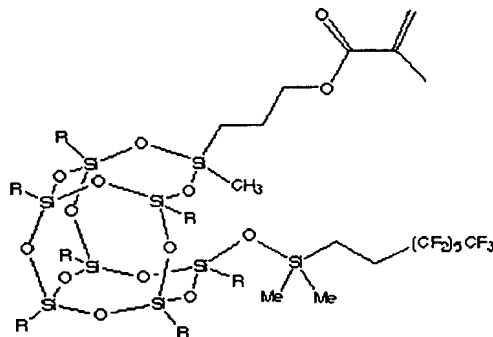
10



R = cyclopentyl


1-(trimethylsiloxy)-1,3,5,9,11,13,15-heptacyclopentyl-7-[3-(methacryl)propyl]-7-methyltetracyclo[9.5.1.1<sup>5,11</sup>.1<sup>9,15</sup>]octasiloxane;

15




1,3,5,7,9-pentavinyl-11,13,15-[1-hydroxy-2-(methacryl)ethyl]pentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;

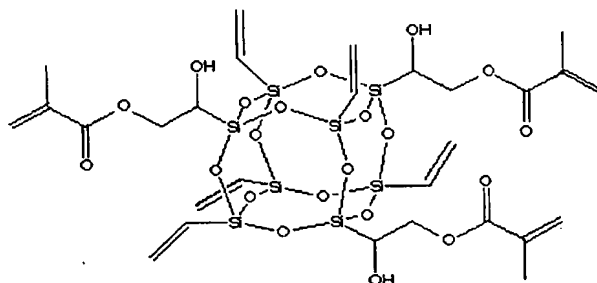5



Average Structure Depicted


1,3,5,7,9,11-hexacyclohexyltetracyclo[5.5.1.13,11.15,9]hexasiloxane;



R = cyclohexyl


10

1,3,5,7,9,11,13,15-octacyclohexylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;




R = cyclohexyl

1,3,5,7,9,11,13,15-octacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl


1,3,5,7,9,11,13,15-octaphenylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;



R = phenyl

5


1,3,5,7,9,11,13,15-octamethylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;



R = methyl

10

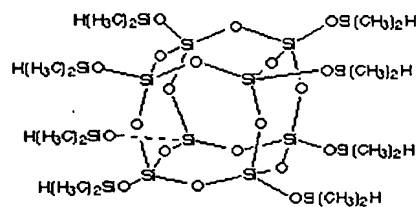
1,3,5,7,9,11,13,15-octakis(dimethylsilyloxy)pentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;



15


20

## POSS-modified Nylon 6;

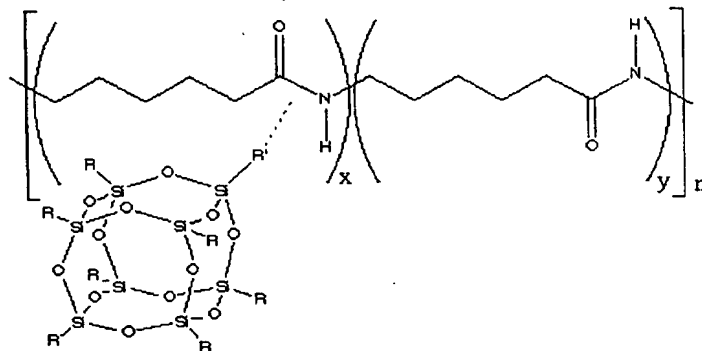


R = cyclopentyl  
R' = amide reactive functionality

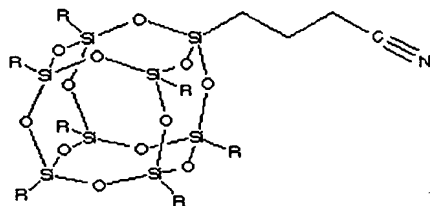1-[(3-cyano)propyl]-3,5,7,9,11,13,15-  
5 heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;




R = cyclopentyl

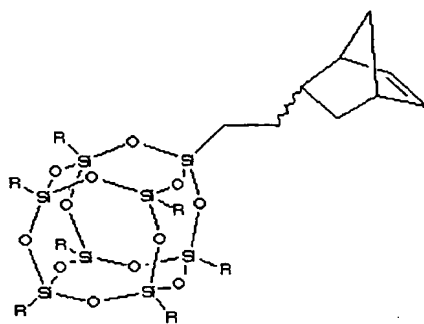1-[2-(Norboren-2-yl)ethyl]-3,5,7,9,11,13,15-  
10 heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl

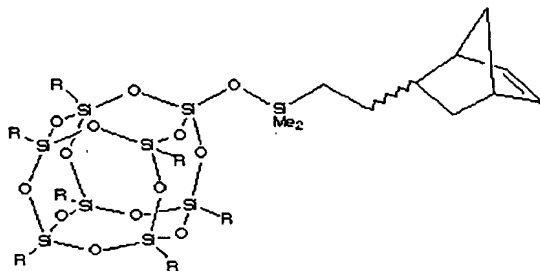
1-[2-(Norbornen-2-yl)ethyl]dimethylsiloxy-  
3,5,7,9,11,13,15heptacyclopentylpentacyclo[9.5.1.1.13,9.15,15.17,13]-octasiloxane;



R = cyclopentyl




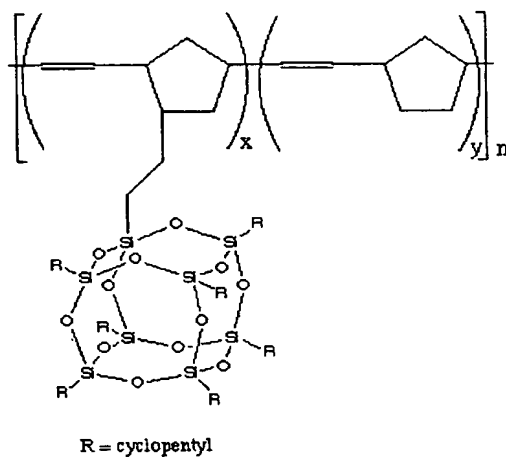Poly(ethylnorbornenylPOSS-co-norbornene);




5

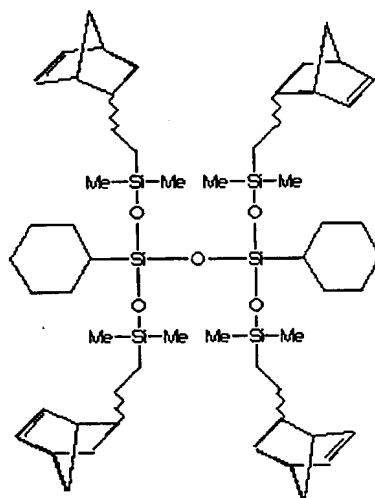1,1,3,3-(Norbornenyldimethylsiloxy)-1,3-dicyclohexyldisiloxane;



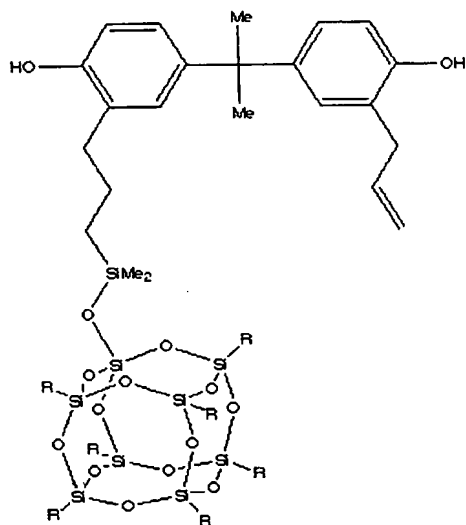
1-[3-(allylbisphenol A)propyldimethylsiloxy]-  
3,5,7,9,11,13,15heptacyclopentylpentacyclo-[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl

5

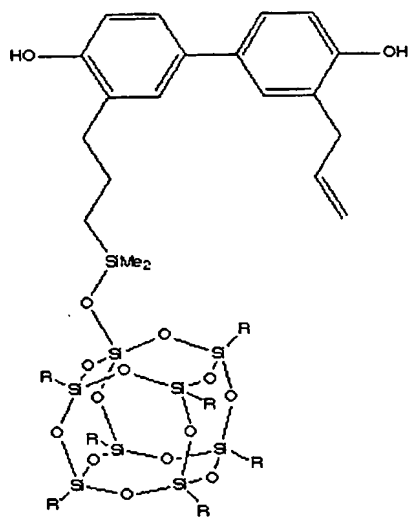
1-[3-(allylbiphenol)propyldimethylsiloxy]-  
3,5,7,9,11,13,15heptacyclopentylpentacyclo-[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl


10

1,3,5,7,9,11,13,15-octavinylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



5


1-vinyl-3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl

10


1-allyl-3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl

15

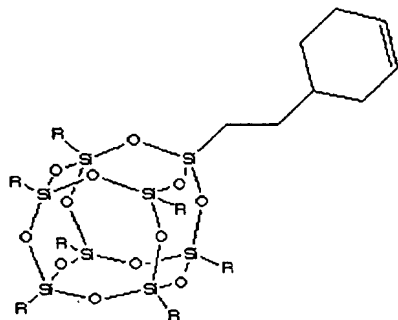
1-[2-(cyclohexen-3-yl)ethyl]-3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl

5

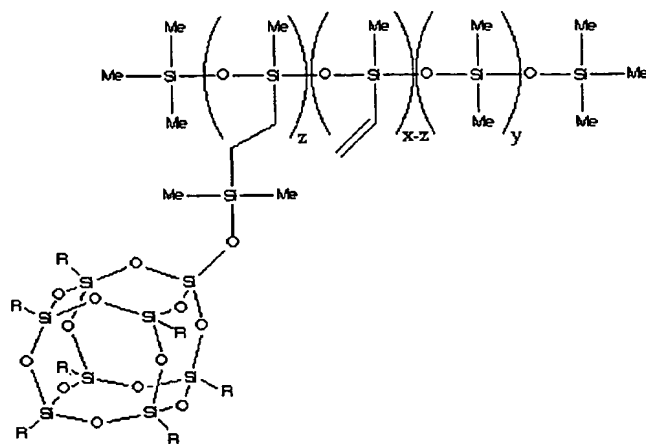
Poly(dimethyl-co-methylvinyl-co-methylethylsiloxypentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane)siloxane;




R = cyclopentyl

10


## POSS-diepoxy resins;

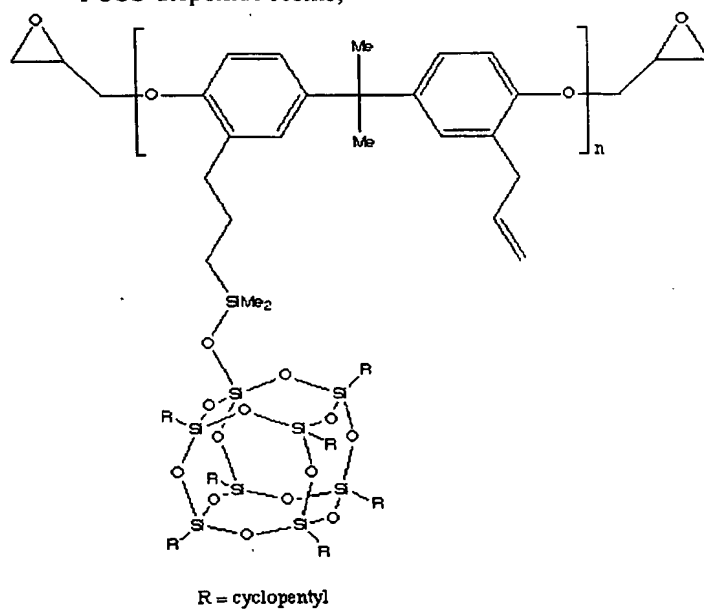

## 5 POSS-BisPhenol A-urethanes;

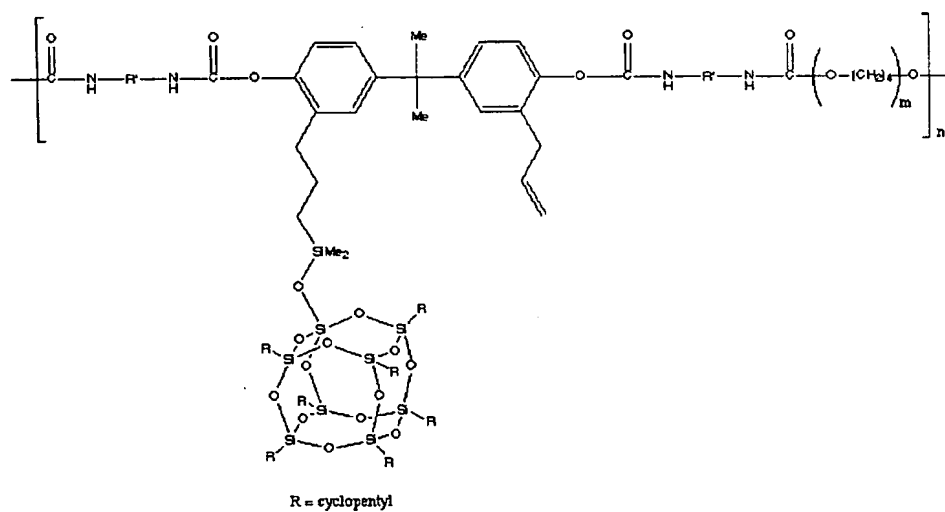

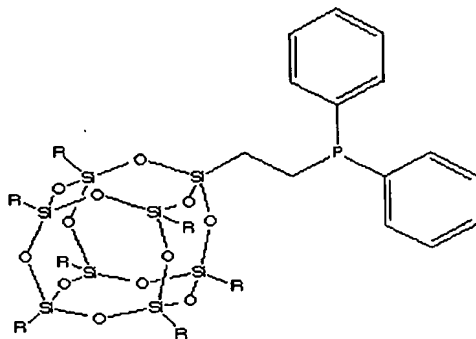
1-[2(diphenylphosphino)ethyl]3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;



R = cyclopentyl

5

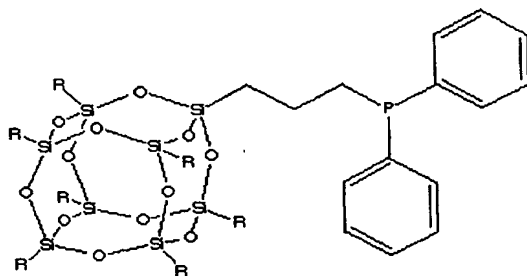
1-[2(diphenylphosphino)propyl]3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;



R = cyclopentyl

10


1-hydrido-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl

15


1-[hydridodimethylsiloxy]-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl

5


*endo*-3,7,14-tri(dimethylsilylhydrido)-1,3,5,7,9,11,14-  
heptacyclopentyltricyclo[7.3.3.15,11]heptasiloxane;



R = cyclopentyl


10

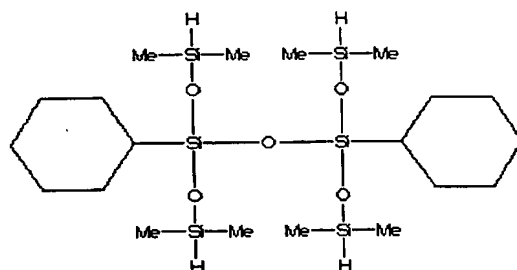1,1,3,3-(hydridodimethylsiloxy)-1,3-dicyclohexyldisiloxane;




15

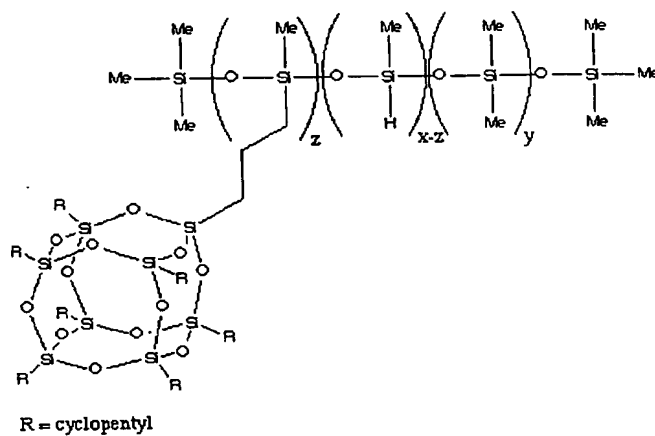Poly(dimethyl-co-methylhydrido-co-methylpropylPOSS)siloxane;




5

*endo*-3,7,14-trihydroxy-1,3,5,7,9,11,14-heptacyclopentyltricyclo[7.3.3.15,11]heptasiloxane;



10


*endo*-3,7,14-trihydroxy-1,3,5,7,9,11,14-heptacyclohexyltricyclo[7.3.3.15,11]heptasiloxane;



15




1-hydroxy-3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;



R = cyclopentyl


5

1,1,3,3-(tetrahydroxy)-1,3-dicyclohexyldisiloxane;



10


1,3,5,7-(tetrahydroxy)-1,3,5,7-(tetraphenyl)cyclotetrasiloxane;



R = phenyl

15

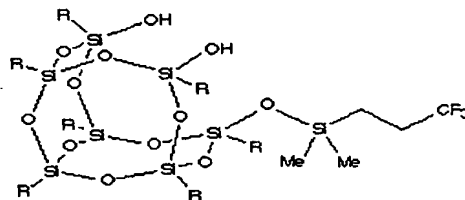
endo-7,14-dihydroxy-3-(3,3,3-trifluoropropyldimethylsiloxy)-1,3,5,9,11,13,15-heptacyclopentyltricyclo[7.3.3.1<sup>5,11</sup>]octasiloxane;



R = cyclopentyl

20

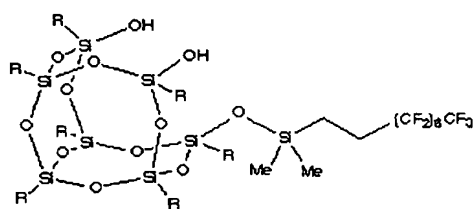
endo-7,14-dihydroxy-3-(3,3,3-trifluoropropyldimethylsiloxy)-1,3,5,9,11,13,15-heptacyclopentyltricyclo[7.3.3.1<sup>5,11</sup>]octasiloxane;



R = cyclopentyl

1-[2-(styryl)ethyl]dimethylsiloxy]-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]-octasiloxane;

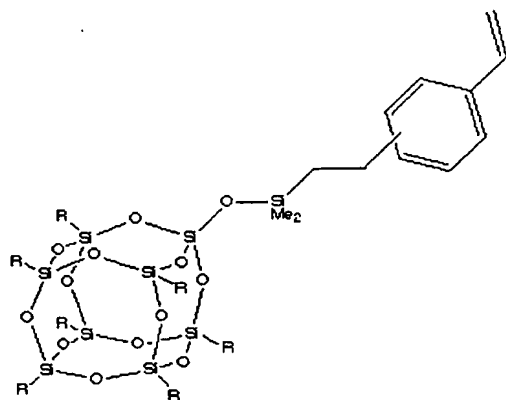
5



R = cyclopentyl


1-[(4-vinyl)phenyl]-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;

10



R = cyclopentyl

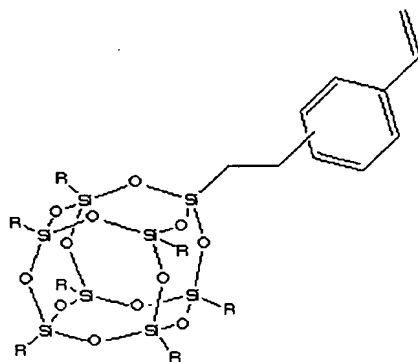
1-[2-(styryl)ethyl]-3,5,7,9,11,13,15-heptacyclopentylpentacyclo[9.5.1.13.9.15,15.17,13]-octasiloxane;



R = cyclopentyl

5

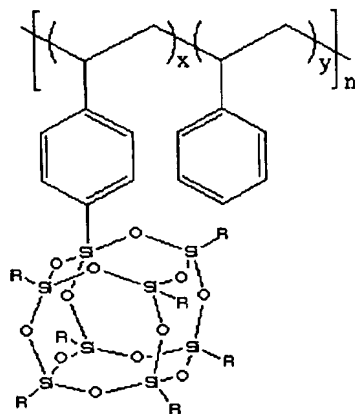
Poly(styrylPOSS-co-styrene);



R = cyclopentyl

10

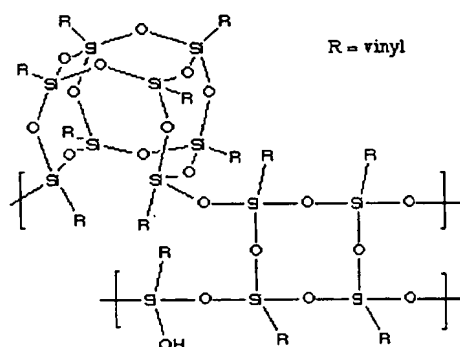poly(vinylsilsesquioxane);




and structures having 10 and 12 silicon atoms in the cage, such as the following.

5

10

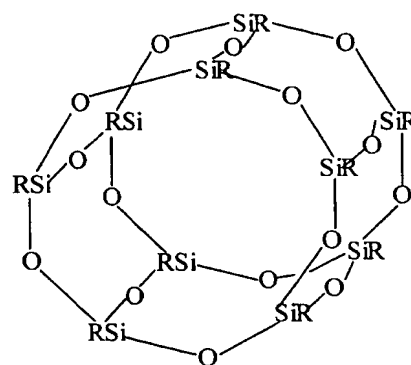
15



20

25

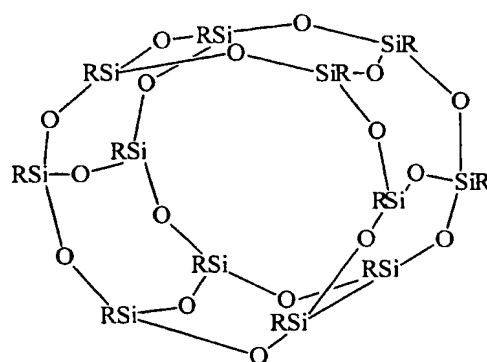30




The nanostructured compound is preferably covalently bonded to a larger molecule, for example, as a pendant group on an organic or organosiloxane polymer. In addition or in the alternative, the nanostructured compound is a repeat unit in an oligomer or polymer. An example of oligomeric binding of the POSS is as follows:

5

10

15

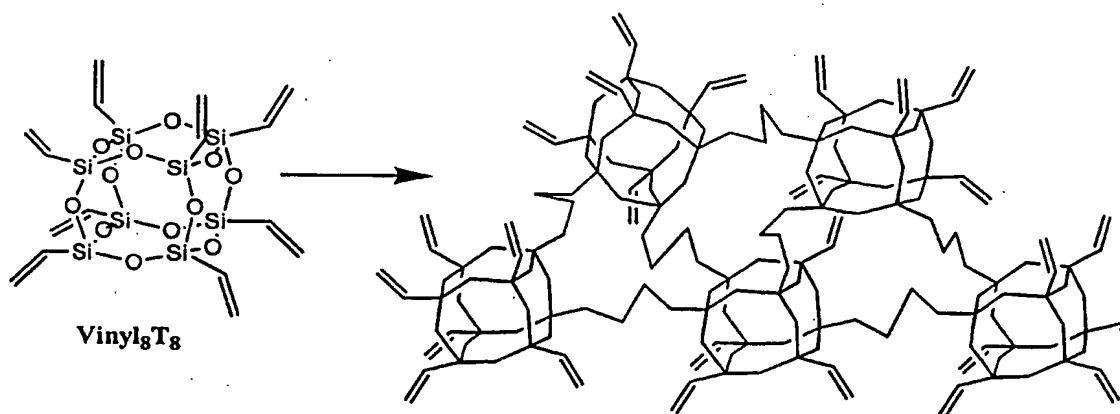20



Polymerized POSS-Network

25

The gas permeable porous material of the present invention preferably includes a film forming agent. The film forming agent is a blend of at least two different polymers or is a random or block copolymer of at least two different polymeric segments.

The film forming agent has at least one polymeric segment selected from the group consisting of polyvinyl, polycarbonate, polyurethane, poly(diorgano)siloxane, polysulfone, polyamide, poly(epoxide), polyepichlorohydrin, polyether, polyester, polyketone, and polyalkylene. Wherein the organo- group of the poly(diorgano)siloxane is selected from the group consisting of methyl, ethyl, n-propyl, isopropyl, n-butyl, iso-butyl, tert-butyl, pentyl, hexyl, cyclohexyl and phenyl; wherein the polyvinyl is selected from the group consisting of polyvinyl alcohol, poly(vinyl alcohol-co-ethylene), polyvinyl chloride, polyvinyl bromide, poly(vinyl acetate), poly(alkyl)acrylate, poly(alkyl)methacrylate, poly(acrylic acid) or salt thereof, polyacrylonitrile, polystyrene, poly(vinyl sulfonic acid) or salt thereof, and poly(vinyl methyl ketone); wherein the polyether is selected from the

30

35

group consisting of poly(ethylene glycol), poly(propylene glycol), poly(ethylene terephthalate), poly(ethylene succinate), polyacetal, and polytetrahydrofuran; and wherein the polyalkylene is selected from the group consisting of polyethylene, polypropylene and polybutadiene. Also, wherein the alkyl group of the poly(alkyl)acrylate or  
5 poly(alkyl)methacrylate is selected from the group consisting of methyl, ethyl, n-propyl, isopropyl, butyl and 2-ethylhexyl.

The gas permeable porous material may be cured with heat or with a curing agent such as peroxide.

In the preparation of the gas permeable porous material, the nanostructured  
10 compound may be bonded through a reactive group to the film forming agent.

The gas permeable porous material has a pore concentration of  $10^{15}$  to  $10^{20}$  pores/ $m^2$ , preferably  $10^{16}$  to  $10^{18}$  pores/ $m^2$ .

The gas permeable porous material can be molded into any form to fit the design needs of the associated apparatus. Preferably the porous material is formed into a film.

15 The present invention, in part, is drawn to an apparatus for separating a mixture of gases by size exclusion, comprising a chamber made of a gas impermeable material, wherein the chamber has an opening sealed with a porous film formed of the gas permeable porous material of the present invention. The apparatus has n chambers in a series with n-1 porous films, wherein each chamber has at least one opening sealed with  
20 the porous film in communication with an opening in another chamber, and wherein n is a whole number greater than 1. Preferably, n is a whole number greater than 2 and the openings in the series of chambers are sealed with porous films having a decreasing average pore size.

For the separation of a mixture of oxygen and nitrogen, the minimum requirements  
25 are two chambers connected by a passage sealed with the inventive porous membrane tailored to have pores with a diameter of 3.55 Å. The mixture is charged into the first chamber. Due to the fact that the working diameter of oxygen is 3.46 Å and that of nitrogen is 3.64 Å, only oxygen will pass through the porous membrane into the second chamber.

30 A more complicated setup is required for the separation of a combustion gas containing oxygen, nitrogen, water and carbon dioxide. In a series of four chambers, the porous membrane between the first and second chamber has an average pore diameter of

3.55 Å, the porous membrane between the second and third chambers has an average pore diameter of 3.4 Å, and the porous membrane between the third and fourth chamber has an average pore diameter of 3.0 Å. In this setup, water will pass through to the fourth chamber for collection, carbon dioxide will be removed from the third chamber, oxygen  
5 from the second chamber and nitrogen is not able to pass through any of the membranes and will be collected from the first chamber.

The inventive method of separating a mixture of at least two gases could be applied to any mixture of gases wherein each gas has a different working diameter. The inventive porous material could be used to separate a mixture of gases flowing from an  
10 industrial exhaust. Ideally, the inventive porous material would isolate gases which are harmful to the environment from the industrial exhaust mixture of gases.

The preferred embodiment of the invention utilizes Polyhedral Oligomeric Silsesquioxane (POSS) materials, which

Table 1.

Working Diameters of Gas Molecules

Gas	Molecular Diameter (Angstroms)
Hydrogen	2.89
Helium	2.6
Oxygen	3.46
Nitrogen	3.64
Carbon Dioxide	3.3
Methane	3.8

are used to modify the molecular structures of monomers or polymers, such as polymethylmethacralate (PMMA). The POSS materials create a rigid "backbone" of  
5 inorganic material within the organic molecular structure of monomers and polymers, separating the organic components and actually creating a small hole in the organic material. Figure 1 illustrates a molecular structure of unmodified POSS and Figure 2 illustrates a molecular structure of partially polymerized POSS. The hole size illustrated in Figures 1 and 2 are on the order of Angstroms, which is precisely the size required for gas  
10 separation in a true molecular sieve. Furthermore, the hole size can be varied over an appreciable range, depending upon the combination of the specific POSS material and the monomer or polymer selected. If more selectivity or "fine tuning" of the hole sizes is required, the POSS materials can be used with organic materials that possess considerable elasticity. If such materials are stretched, the holes in the material become elongated in the  
15 direction of stretching, and become smaller in the direction normal to the stretching force. As explained previously, only one dimension of the hole needs to be within the desired limits. For example, a hole in a POSS-modified material may initially be round, with a diameter of 5.0Å. By stretching the material, the holes can be transformed into ovals, with



a length of perhaps 7.0Å, but a height of 3.5Å. A nitrogen molecule, with a diameter of 3.6Å, could not fit through such a hole. For the described reasons of basic hole size tailorability, plus the modifying effect of stretching, the use of POSS-modified organics is an ideal method of "tailoring" the hole size for the specific gas separation desired.

5           Conventional methods depend on very complex physical and chemical theories, notably membrane laws by Fick, and solution-diffusion of gases in polymers. Zeolites used as molecular sieves require additional work, such as pressure swing, or temperature sieving manipulations to effect separation.

10           The main limiting factor is the size of the opening through which the gas needed to pass cannot be controlled or structured to eliminate that as a function of the so called permeation coefficient.

          In response to this true molecular sieve concepts create a channel, pore, or hole, which are uniformly sized paths through a material which are sized according to the requirement of the gases chosen to separate.

15           If a simple mixture of oxygen and nitrogen are taken as an example, Table 1 shows oxygen is slightly smaller than nitrogen in its effective working diameter. Therefore, if paths are formed which are too small for nitrogen (3.64Å) but larger than that of oxygen (3.46Å), then oxygen can be separated from nitrogen.

20           In other systems such as membranes, the separation is a function of solution diffusion, and is therefore very slow. In molecular sieve zeolites, the system is charged, discharged and recharged, a cycle operation and must be given time to go through the cycle and requires more energy. A "true" molecular sieve is a near instantaneous process since the linear velocity of gas molecules is on the order of magnitude 600 meters per second, the time required to transit the pathway is on the order of magnitude of a fraction  
25 of a second, so the passage of continuous flow is established. If the number of pathways is large, the quantity of gas passing a unit area is larger than for organic membranes or zeolites.

          Calculations for oxygen passage through a true molecular sieve having a five percent opening (paths) area show that a square meter of such a device would allow 3.46Å  
30 – effective working diameter of oxygen- gas molecules to pass in ton quantities per day. Molecular sieve zeolite technology to produce such quantities would be a literal factory with tons of bed material. No other system would compare.

Example 1

Oxygen having a working diameter of 3.46Å (a pore diameter of 3.55Å is used for ease of passage) has an area of

$$5 \quad A = \left(\frac{1}{2} D\right)^2 \pi$$

$$A_{\text{pore}} = \left(\frac{3.55\text{Å}}{2}\right)^2 \pi = (1.77)^2 \pi = 9.84\text{Å}^2$$

$$1 \text{ square meter} = 10^{10} \times 10^{10} \text{Å}^2$$

$$= 10^{20} \text{Å}^2$$

$$5\% \text{ open} = .05 \times 10^{20} \text{Å}^2$$

$$10 \quad \text{number of pores is } \frac{.05 \times 10^{20} \text{Å}^2}{9.90 \text{Å}^2} = 5.05 \times 10^{17}$$

(1.77Å produces an  $A_{\text{pore}} = 9.84\text{Å}^2$  whereas 1.78Å produces an  $A_{\text{pore}} = 9.95\text{Å}^2$ , so an average of 9.90Å is used)

Time of passage taken as  $1 \times 10^{-6}$  sec; then

$$\frac{5.05 \times 10^{17}}{1 \times 10^{-6}} = 5.05 \times 10^{23} \text{ molecules per second}$$

$$15 \quad 5.05 \times 10^{23} \text{ molecules of oxygen per second}$$

One mole of oxygen is 32 grams. Avagadro's number is  $6.02 \times 10^{23}$

Therefore:

$$\frac{5.05 \times 10^{23}}{6.02 \times 10^{23}} \times 32 = 0.83 \text{ mole} \times 32 \text{g / mole} = 26.6 \text{g / sec.}$$

Per day: .83 mole/ sec of oxygen gives since

$$20 \quad 24 \text{ hours is } 84,600 \text{ sec}$$

this is : .83 mole/sec x 84,600 sec = 70,218 moles

$$\times 32 \text{ g/mole} = (71,903,232 \text{ g/day/m}^2)$$

$$(158,203 \text{ lbs./day/m}^2)$$

$$(79.1 \text{ tons/day/m}^2)$$

5            Although many methods of synthesis for the gas separator are possible, a silicon oxygen polymeric material generally described as a POSS material is preferred in one embodiment. Figures 1-3 illustrate a monomer, a prepolymer, and a polymeric form. Calculations have shown that of the POSS T8 (wherein "T#" refers to the number of tetrahedral silicon atoms in the cage), T10 and T12 cages, the T12 cage.

10           The diameter of T8 is 15Å, so it is a cube of face area of 225Å<sup>2</sup>. The enlargement to T12 makes a Roganite size face with an internal opening about 4Å, but must be a cube somewhat larger than the T8. For simplicity, assume a 25 x 25 x 25 cube; and that they are located 3 to 5Å apart,

$$(2 \text{ carbons} = 4\text{Å} \text{ and } 4 \text{ carbons} = 8\text{Å}).$$

15           (33Å)<sup>2</sup> = 1089Å<sup>2</sup>

$$(4\text{Å}/2\text{Å})^2 \pi = 12.6\text{Å}^2$$

$$\frac{12.6\text{Å}^2}{1089\text{Å}^2} = 1.116\% \text{ openings}$$

$$1089\text{Å}^2$$

$$1 \text{ m}^2 = 10^{20} \text{ Å}^2$$

20           therefore 1 m<sup>2</sup> has:

$$10^{20} \text{ Å}^2 \times 1.16\% = 1.16 \times 10^{18} \text{ holes.}$$

$$1 \text{ atom/hole}/10^{-6} \text{ sec is } 1.16 \times 10^{24} \text{ atoms/sec.}$$

$$\frac{1.16 \times 10^{24}}{6.06 \times 10^{23}} = 1.9 \text{ mole/sec}$$

$$6.06 \times 10^{23}$$

If oxygen then:  $1.9 \text{ mole/sec} \times 32 \text{ g/mole} \times 86,400 \text{ sec/day} \Rightarrow$

$$5,253,120 \times 10^2 \text{ g/day}$$

Or:  $5.78 \text{ tons oxygen/day/m}^2$ .

As an alternate method of variably selecting hole sizes in a true molecular sieve for  
5 separation of gases, the pores or holes may be formed by various micro-machining  
methods such as ablation, vapor deposition, etching by ions, chemical solutions,  
augmented by laser light, heat, or ultraviolet light, masked or unmasked, templating,  
inverse opal methods, or any system that allows uniform openings to be prepared. Initially,  
a thin film of aluminum or other metal could be sputtered onto a metal, ceramic, or  
10 organic substrate. The metal is chosen based upon the desired depth of sputtering and the  
lattice constant of the metal. For instance, if a sputter depth of  $3.2 \text{ \AA}$  is desired, then it  
would be preferred to use a metal having a lattice constant of  $3.2 \text{ \AA}$ . Typical metals which  
can be used are iron, copper, nickel, chromium, cobalt, gold, silver, titanium, silicon and  
lead. Then, by one of the methods mentioned above, the thin film would be removed in a  
15 specific pattern based on the use of a photo-resist mask. The resist would then be removed,  
leaving tracks or channels in the thin film. It would not be necessary to control the widths  
of these tracks, so any micro-machining method could be used. The only critical  
dimension is depth, and this can be controlled by variables such as the etchant used or the  
time of exposure to the catalyst light. The depth of the tracks could also be controlled by  
20 the type of metal in the thin film, since different metals have different lattice constants,  
and the removal of a few atoms of one metal would create a track of a different depth than  
the removal of the same number of atoms of a different metal. The structure of the thin  
film containing tracks is shown in Figures 6 and 7.

Once the channels have been created in the metallic thin film, the structure could  
25 be cut into parallel pieces and assembled as a sandwich (Figure 6), supported by a  
mechanical system so the assembly will allow the passage of gases. If necessary, the  
layers could be assembled by placing the thin metallic films in contact with each other,  
and removing the substrate by methods previously described. This approach would  
eliminate the thickness of the substrate from the final assembly, thereby resulting in a

higher level of porosity. An alternate method of creating the porous structure would be to make a long thin film, and then roll the film as in Figure 5.

As a third method of selecting hole sizes in a true molecular sieve, very small spheres (microspheres) of a uniform and appropriate diameter can be pressed into a porous pellet. Close packing of spheres results in a pore volume of approximately 74%. However, the largest continuous pore diameter within a structure of close-packed spheres is 15.4% of the diameter of the spheres (Figure 8). Thus, spheres of a diameter of 5 nm (50Å) would press into a porous compact in which the maximum continuous pore size would be approximately 7.7Å. If the spheres deformed during pressing, or as the result of other consolidation procedures such as sintering, even smaller pores would be created for a given size of sphere (Figure 9). For example, it can be shown that at 8% deformation of the spheres, the pore size is reduced to approximately 6% of the original sphere diameter. Thus, the same 5-nm spheres would produce a structure with 3.12Å.

In each of the following Examples, the values of weight percent (wt%) are measured as a percentage of the total weight of the mixture. The units of "mμ" refer to  $1 \times 10^{-6}$  meters.

#### Example 2

A porous film is prepared by mixing 30wt% of octa vinyl POSS with 68wt% polydimethylsiloxane (a silicone film former) and curing with 2wt% benzoyl peroxide at 60°C for 1 hour. The combined mixture is coated on a 0.2mμ stainless steel filter support.

#### Example 3

A porous film for separating carbon dioxide and methane is prepared by mixing 40wt% gamma-cyclodextrin-hydroxypropyl derivative with 60 wt% VixTx (POSS vinyl

resin). This mixture is dissolved in denatured alcohol and cast into a film on a 0.2m $\mu$  stainless steel support. No curing agent is required.

#### Example 4

A porous film for separating methane and nitrogen is prepared by dissolving  
5 50wt% polyvinyl POSS (VixTx) resin and 50wt% VnTn (POSS 8, 10 and 12 cages) in tetrahydrofuran and cast on a 0.2 m $\mu$  stainless steel support. No curing agent is required.

#### Example 5

A porous film for separating air components from higher molecular hydrocarbons in recovery of propane, hexanes, pentanes, and/or butanes from waste streams is prepared  
10 by dispersing 50% by weight polyvinyl POSS (VixTx) resin and 50wt% dodecyl phenyl T<sub>12</sub> in tetrahydrofuran and coating the dispersion on a 0.2m $\mu$  stainless steel filter support. No curing agent is required.

#### Example 6

A porous film for oxygen enhancement (the degree of which is related to the POSS  
15 concentration) prepared by mixing 50% by weight methyl methacrylate, 48wt% vinyl POSS cages (T<sub>8</sub> (VnTn POSS), T<sub>10</sub>, T<sub>12</sub>), and 2wt% curing agent are made into a film on a 0.2 m $\mu$  stainless steel support.

#### Example 7

20 A porous film for separating gases prepared by mixing 20% by weight of poly(vinylsilsesquioxane), 40% 1,3,5,7,9,11,13,15-octavinylpentacyclo[9.5.1.13,9.15,-15.17,13]octasiloxane (octavinyl POSS), and 38% dimethylsiloxane in tetrahydrofuran, adding 2% benzoyl peroxide. The mixture is coated on a 0.2m $\mu$  stainless steel filter support.

Example 8

A porous film for separating gases prepared by mixing 54% by weight styrene, 4wt% divinylbenzene, 40wt% 1,3,5,7,9,11,13,15-octavinylpentacyclo[9.5.1.13,9.15,-  
5 15.17,13]octa-siloxane (octavinyl POSS), and in tetrahydrofuran, then adding 2wt% benzoyl peroxide. The mixture is coated on a 0.2m $\mu$  stainless steel filter support.

Example 9

A porous film for separating gases prepared by separately forming two mixtures: in  
a reaction flask, 40wt% 1,3,5,7,9,11,13,15-octavinylpentacyclo[9.5.1.13,9.15,-  
10 15.17,13]octa-siloxane (octavinyl POSS) is combined with tetrahydrofuran, followed by adding 2wt% benzoyl peroxide; and in a second reaction flask, 54% by weight styrene and 4wt% divinylbenzene are combined with tetrahydrofuran. The two mixtures are then combined in a single flask. The combined mixture is coated on a 0.2m $\mu$  stainless steel filter support.

## WHAT IS CLAIMED IS:


1. A permeable porous material for separating a mixture of gases by selectable pore size exclusion, comprising pores formed with at least one nanostructured compound.
- 5 2. The gas permeable porous material according to claim 1, wherein said at least one nanostructured compound is a repeat unit in an oligomer or polymer.
3. The gas permeable porous material according to claim 1, further comprising at least one of a film forming agent and a curing agent.
- 10 4. The gas permeable porous material according to claim 1, wherein the selectable pore size exclusion is a function of the effective working diameter of the gas atoms or molecules.
- 15 5. The gas permeable porous material according to claim 3, wherein said at least one nanostructured compound is bonded through a reactive group to the film forming agent.
- 20 6. The gas permeable porous material according to claim 3, wherein the film forming agent has at least one polymeric segment selected from the group consisting of polyvinyl, polycarbonate, polyurethane, poly(diorgano)siloxane, polysulfone, polyamide, poly(epoxide), polyepichlorohydrin, polyether, polyester, polyketone, and polyalkylene.
- 25 7. The gas permeable porous material according to claim 6, wherein the film forming agent is a blend of at least two different polymers or is a random or block copolymer of at least two different polymeric segments.
- 30 8. The gas permeable porous material according to claim 6, wherein the organo- group of the poly(diorgano)siloxane is selected from the group consisting of methyl, ethyl, n-propyl, isopropyl, n-butyl, iso-butyl, tert-butyl, pentyl, hexyl, cyclohexyl and phenyl;



wherein the polyvinyl is selected from the group consisting of polyvinyl alcohol, poly(vinyl alcohol-*co*-ethylene), polyvinyl chloride, polyvinyl bromide, poly(vinyl acetate), poly(alkyl)acrylate, poly(alkyl)methacrylate, poly(acrylic acid) or salt thereof, polyacrylonitrile, polystyrene, poly(vinyl sulfonic acid) or salt thereof, and  
5 poly(vinyl methyl ketone); wherein the polyether is selected from the group consisting of poly(ethylene glycol), poly(propylene glycol), poly(ethylene terephthalate), poly(ethylene succinate), polyacetal, and polytetrahydrofuran; and wherein the polyalkylene is selected from the group consisting of polyethylene, polypropylene and polybutadiene.

10

9. The gas permeable porous material according to claim 8, wherein the alkyl group of the poly(alkyl)acrylate or poly(alkyl)methacrylate is selected from the group consisting of methyl, ethyl, n-propyl, isopropyl, butyl and 2-ethylhexyl.
- 15 10. The gas permeable porous material according to claim 1, wherein the at least one nanostructured compound is optionally substituted and is selected from the group consisting of a polyhedral oligomeric silsequioxane (POSS), zeolite, cyclomacroether, porphyrin, foldamer, cyclodextrin and mixtures thereof.
- 20 11. The gas permeable porous material according to claim 1, wherein the at least one nanostructured compound is substituted with an alcohol, alkoxysilane, amine, chlorosilane, epoxide, ester, halide, methacrylate, molecular silica, nitrile, norbornene, olefin, phosphine, silane, silanol, or styrene.
- 25 12. The gas permeable porous material according to claim 10, wherein the POSS has a molecular formula of:



- 30 wherein n is 4-36, 48 or 60, and R is a reactive substituent.

13. The gas permeable porous material according to claim 10, wherein the POSS is selected from the group consisting of:

- 1-[3-(allylbisphenol A)propyldimethylsiloxy]-  
3,5,7,9,11,13,15heptacyclopentylpentacyclo-[9.5.1.13,9.15,15.17,13]octasiloxane;
- 5 1-[3-(allylbiphenol)propyldimethylsiloxy]-  
3,5,7,9,11,13,15heptacyclopentylpentacyclo-[9.5.1.13,9.15,15.17,13]octasiloxane;
- 1-[3-(1,3-propanediol-2-ethyl-2-methyloxy)propyldimethylsiloxy]-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo-[9.5.1.13,9.15,15.17,13]octasiloxane;
- 1-[(2-methyl,2-hydroxy)butyldimethylsiloxy]-3,5,7,9,11,13,15-  
10 heptacyclopentylpentacyclo-[9.5.1.1<sup>3,9</sup>,1<sup>15,15</sup>,1<sup>7,13</sup>]octasiloxane;
- 1-[3-(ethoxydimethylsilyl)propyl]3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>,1<sup>15,15</sup>,1<sup>7,13</sup>]octasiloxane;
- 1-[2-(diethoxymethylsilyl)propyl]3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>,1<sup>15,15</sup>,1<sup>7,13</sup>]octasiloxane;
- 15 1-[3-(triethoxysilyl)propyl]3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>,1<sup>15,15</sup>,1<sup>7,13</sup>]octasiloxane;
- 1-[2-(ethoxydimethylsilyl)ethyl]3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>,1<sup>15,15</sup>,1<sup>7,13</sup>]octasiloxane;
- 1-[2-(diethoxymethylsilyl)propyl]3,5,7,9,11,13,15-  
20 heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>,1<sup>15,15</sup>,1<sup>7,13</sup>]octasiloxane;
- 1-[2-(triethoxysilyl)propyl]3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>,1<sup>15,15</sup>,1<sup>7,13</sup>]octasiloxane;
- POSS-BisPhenol A-urethanes;
- POSS-DiMethylol-urethanes;
- 25 1-chloro-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;
- 1-[2-(chlorodimethylsilyl)ethyl]-  
3,5,7,9,11,13,15heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;
- 1-[2-(dichloromethylsilyl)ethyl]-  
30 3,5,7,9,11,13,15heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;
- 1-[2-(trichlorosilyl)ethyl]-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;

- 1-[3-(chlorodimethylsilyl)propyl]-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]-octasiloxane;
- 1-[3-(dichloromethylsilyl)propyl]-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]-octasiloxane;
- 5 1-[3-(trichlorosilyl)propyl]-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]-octasiloxane;
- 1,3,5,7,9,11,13,15-[2-(  
(chlorodimethylsilyl)ethyl]pentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]-octasiloxane;
- 1,3,5,7,9,11,13,15-[2-(  
10 (chlorodimethylsilyl)ethyl]pentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]-octasiloxane;
- 1,3,5,7,9,11,13,15-[2-(  
(dichlorodimethylsilyl)ethyl]pentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]-octasiloxane;
- 1-[(2-epoxy)propyl]-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]-octasiloxane;
- 15 1-[2-(cyclohexyl-3-epoxy)ethyl]-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]-octasiloxane;
- POSS-diepoxy resins;
- 1,3,5,7,9-octavinyl-11,13,15-  
epoxyethylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]-octasiloxane;
- 20 endo-3,7,14-tris[1-(3-dimethylsiloxy)propyloxy-2,3-epoxypropyl]-1,3,5,7,9,11,14,-  
heptacyclopentyltricyclo[7.3.3.1<sup>5,11</sup>]-heptasiloxane;
- 1-(methylpropionato)-3,5,7,9,11,13,15-heptacyclopentylpentacyclo  
[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]-octasiloxane;
- 1-(ethylundecanoato)-3,5,7,9,11,13,15-  
25 heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]-octasiloxane;
- 1-[(3-chloro)propyl]-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]-octasiloxane;
- 1-[4-chlorophenyl]-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]-octasiloxane;
- 30 1-[chlorobenzyl]-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]-octasiloxane;

- 1-[2-(chlorobenzyl)ethyl]-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.13.9.15,15.17,13]octasiloxane;
- 1-[3-(methacryl)propyl]-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.13.9.15,15.17,13]octasiloxane;
- 5 1-[3-(methacryl)propyldimethylsiloxy]-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.13.9.15,15.17,13]-octasiloxane;
- 1-(3,3,3-trifluoropropyldimethylsiloxy)-1,3,5,9,11,13,15-heptacyclopentyl-7-[3-  
(methacryl)propyl]-7-methyltetraacyclo[9.5.1.1<sup>5,11</sup>.1<sup>9,15</sup>]octasiloxane;
- 1-(tridecafluoro-1,1,2,2-tetrahydrooctyldimethylsiloxy)-1,3,5,9,11,13,15-  
10 heptacyclopentyl-7-[3-(methacryl)propyl]-7-  
methyltetraacyclo[9.5.1.1<sup>5,11</sup>.1<sup>9,15</sup>]octasiloxane;
- 1-(trimethylsiloxy)-1,3,5,9,11,13,15-heptacyclopentyl-7-[3-(methacryl)propyl]-7-  
methyltetraacyclo[9.5.1.1<sup>5,11</sup>.1<sup>9,15</sup>]octasiloxane;
- 1,3,5,7,9-pentavinyl-11,13,15-[1-hydroxy-2-  
15 (methacryl)ethyl]pentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;
- 1,3,5,7,9,11-hexacyclohexyltetraacyclo[5.5.1.13,11.15,9]hexasiloxane;
- 1,3,5,7,9,11,13,15-octacyclohexylpentacyclo[9.5.1.13.9.15,15.17,13]octasiloxane;
- 1,3,5,7,9,11,13,15-octacyclopentylpentacyclo[9.5.1.13.9.15,15.17,13]octasiloxane;
- 1,3,5,7,9,11,13,15-octaphenylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;
- 20 1,3,5,7,9,11,13,15-octamethylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;
- 1,3,5,7,9,11,13,15-  
octakis(dimethylsiloxy)pentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;
- POSS-modified Nylon 6;
- 1-[(3-cyano)propyl]-3,5,7,9,11,13,15-  
25 heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;
- 1-[2-(Norbornen-2-yl)ethyl]-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.13.9.15,15.17,13]octasiloxane;
- 1-[2-(Norbornen-2-yl)ethyldimethylsiloxy]-  
3,5,7,9,11,13,15heptacyclopentylpentacyclo[9.5.1.13.9.15,15.17,13]-octasiloxane;
- 30 Poly(ethylnorbornenylPOSS-co-norbornene);
- 1,1,3,3-(Norbornenyldimethylsiloxy)-1,3,-dicyclohexyldisiloxane;

- 1-[3-(allylbisphenol A)propyldimethylsiloxy]-  
3,5,7,9,11,13,15heptacyclopentylpentacyclo-[9.5.1.13,9.15,15.17,13]octasiloxane;  
1-[3-(allylbiphenol)propyldimethylsiloxy]-  
3,5,7,9,11,13,15heptacyclopentylpentacyclo-[9.5.1.13,9.15,15.17,13]octasiloxane;  
5 1,3,5,7,9,11,13,15-octavinylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;  
1-vinyl-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;  
1-allyl-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;  
10 1-[2-(cyclohexen-3-yl)ethyl]-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;  
Poly(dimethyl-co-methylvinyl-co-methylethylsiloxyPOSS)siloxane;  
POSS-diepoxy resins;  
POSS-BisPhenol A-urethanes;  
15 1-[2(diphenylphosphino)ethyl]3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;  
1-[2(diphenylphosphino)propyl]3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.1<sup>3,9</sup>.1<sup>5,15</sup>.1<sup>7,13</sup>]octasiloxane;  
1-hydrido-3,5,7,9,11,13,15-  
20 heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;  
1-[hydridodimethylsiloxy]-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;  
*endo*-3,7,14-tri(dimethylsilylhydrido)-1,3,5,7,9,11,14-  
heptacyclopentyltricyclo[7.3.3.15,11]heptasiloxane;  
25 1,1,3,3-(hydridodimethylsiloxy)-1,3-dicyclohexyldisiloxane;  
Poly(dimethyl-co-methylhydrido-co-methylpropylPOSS)siloxane;  
*endo*-3,7,14-trihydroxy-1,3,5,7,9,11,14-  
heptacyclopentyltricyclo[7.3.3.15,11]heptasiloxane;  
*endo*-3,7,14-trihydroxy-1,3,5,7,9,11,14-  
30 heptacyclohexyltricyclo[7.3.3.15,11]heptasiloxane;  
1-hydroxy-3,5,7,9,11,13,15-  
heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;

- 1,1,3,3-(tetrahydroxy)-1,3-dicyclohexyldisiloxane;  
 1,3,5,7-(tetrahydroxy)-1,3,5,7-(tetraphenyl)cyclotetrasiloxane;  
 endo-7,14-dihydroxy-3-(3,3,3-trifluoropropyl dimethylsiloxy)-1,3,5,9,11,13,15-  
 heptacyclopentyltricyclo[7.3.3.1<sup>5,11</sup>]octasiloxane;  
 5 endo-7,14-dihydroxy-3-(3,3,3-trifluoropropyl dimethylsiloxy)-1,3,5,9,11,13,15-  
 heptacyclopentyltricyclo[7.3.3.1<sup>5,11</sup>]octasiloxane;  
 1-[2-(styryl)ethyl dimethylsiloxy]-3,5,7,9,11,13,15-  
 heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]-octasiloxane;  
 1-[(4-vinyl)phenyl]-3,5,7,9,11,13,15-  
 10 heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]octasiloxane;  
 1-[2-(styryl)ethyl]-3,5,7,9,11,13,15-  
 heptacyclopentylpentacyclo[9.5.1.13,9.15,15.17,13]-octasiloxane;  
 Poly(styrylPOSS-co-styrene);  
 poly(vinylsilsesquioxane); T10 compound, T12 compound, T14 compound, and  
 15 mixtures thereof.
14. The gas permeable porous material according to claim 3, wherein the curing agent is a peroxide.
- 20 15. The gas permeable porous material according to claim 3, wherein the material has  $10^{15}$  to  $10^{20}$  pores/m<sup>2</sup>.
16. The gas permeable porous material according to claim 3, wherein the material has  $10^{16}$  to  $10^{18}$  pores/m<sup>2</sup>.
- 25 17 A porous film which is selectively permeable to gases, comprising the porous material according to claim 1.
18. An apparatus for separating a mixture of gases by size exclusion, comprising a  
 30 chamber made of a gas impermeable material, wherein the chamber has an opening sealed with a porous film which is selectively permeable to gases as defined in claim 17.

19. The apparatus for separating a mixture of gases by size exclusion according to claim 18, wherein the apparatus has  $n$  chambers in a series with  $n-1$  porous films, wherein each chamber has at least one opening sealed with the porous film in communication  
5 with an opening in another chamber, and wherein  $n$  is a whole number greater than 1.
20. The apparatus for separating a mixture of gases by size exclusion according to claim 19, wherein  $n$  is a whole number greater than 2 and the openings in the series of chambers are sealed with porous films having a decreasing average pore size.  
10
21. The apparatus for separating a mixture of gases by size exclusion according to claim 20, wherein a series of openings are sealed with porous films having an average pore size of  $\sim 3.55 \text{ \AA}$ ,  $\sim 3.4 \text{ \AA}$  and  $\sim 3.0 \text{ \AA}$ .
- 15 22. A method of preparing the gas permeable porous material according to claim 3, comprising polymerizing a composition comprising a nanostructured compound.
23. The method according to claim 22, further comprising reacting the polymeric nanostructured compound with a film forming agent.  
20
24. The method according to claim 23, further comprising combining a poly(vinylsilsesquioxane).
25. A method of separating a mixture of at least two gases by size exclusion, comprising  
25 contacting the mixture of gases with a gas permeable porous film as defined in claim 17, wherein the gas permeable porous film has pores which do not allow permeation of at least one gas.
26. The method of separating a mixture of at least two gases according to claim 25,  
30 wherein the mixture of gases is air.

27. The method of separating a mixture of at least two gases according to claim 25,  
wherein the mixture of gases includes nitrogen and oxygen.
28. The method of separating a mixture of at least two gases according to claim 25,  
5 wherein the mixture of gases is an industrial exhaust mixture of gases.
29. The method of separating a mixture of at least two gases according to claim 28,  
wherein gases which are harmful to the environment are isolated from the industrial  
exhaust mixture of gases.
- 10 30. The gas permeable porous material according to claim 1, wherein said at least one  
nanostructured compound is poly(vinylsilsesquioxane).
31. The gas permeable porous material according to claim 1, further comprising a film  
15 forming agent.
32. The gas permeable porous material according to claim 1, further comprising a curing  
agent.
- 20 33. The gas permeable porous material according to claim 1, further comprising a film  
forming agent and a curing agent.
34. The gas permeable porous material according to claim 30, further comprising a film  
forming agent.
- 25 35. The gas permeable porous material according to claim 30, further comprising a curing  
agent.
36. The gas permeable porous material according to claim 30, further comprising a film  
30 forming agent and a curing agent.
37. A method of preparing a gas permeable porous material comprising:



-56-

sputtering a thin metal film on a metal, ceramic, or organic substrate,  
forming a film of a photoresist resin on the thin film,  
curing the photoresist resin in a predetermined pattern by laser light,  
removing uncured photoresist resin thereby forming a masked thin metal film,  
5 applying a predetermined amount of an etchant solution to the masked thin metal film  
to form tracks or channels in the thin film, and  
enclosing the tracks or channels with a second thin metal film.

38. A method of preparing a gas permeable porous material comprising:  
pressing microspheres of a uniform diameter into a pellet.

10

39. The gas permeable porous material according to claim 12, wherein n is 8, 10, 12 or 14.

Figure 1

● = Silicon

● = Oxygen

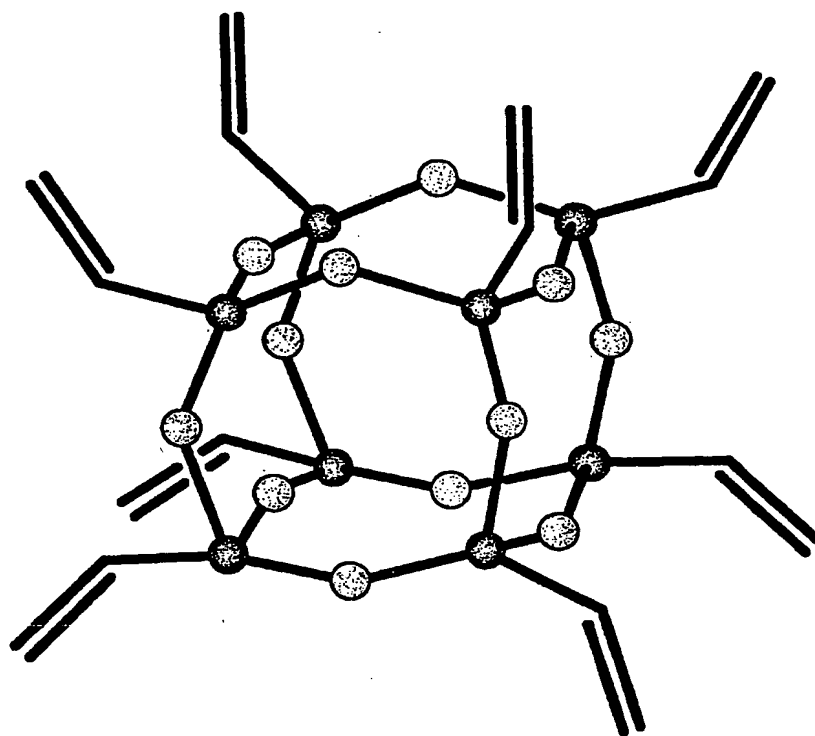


Figure 2


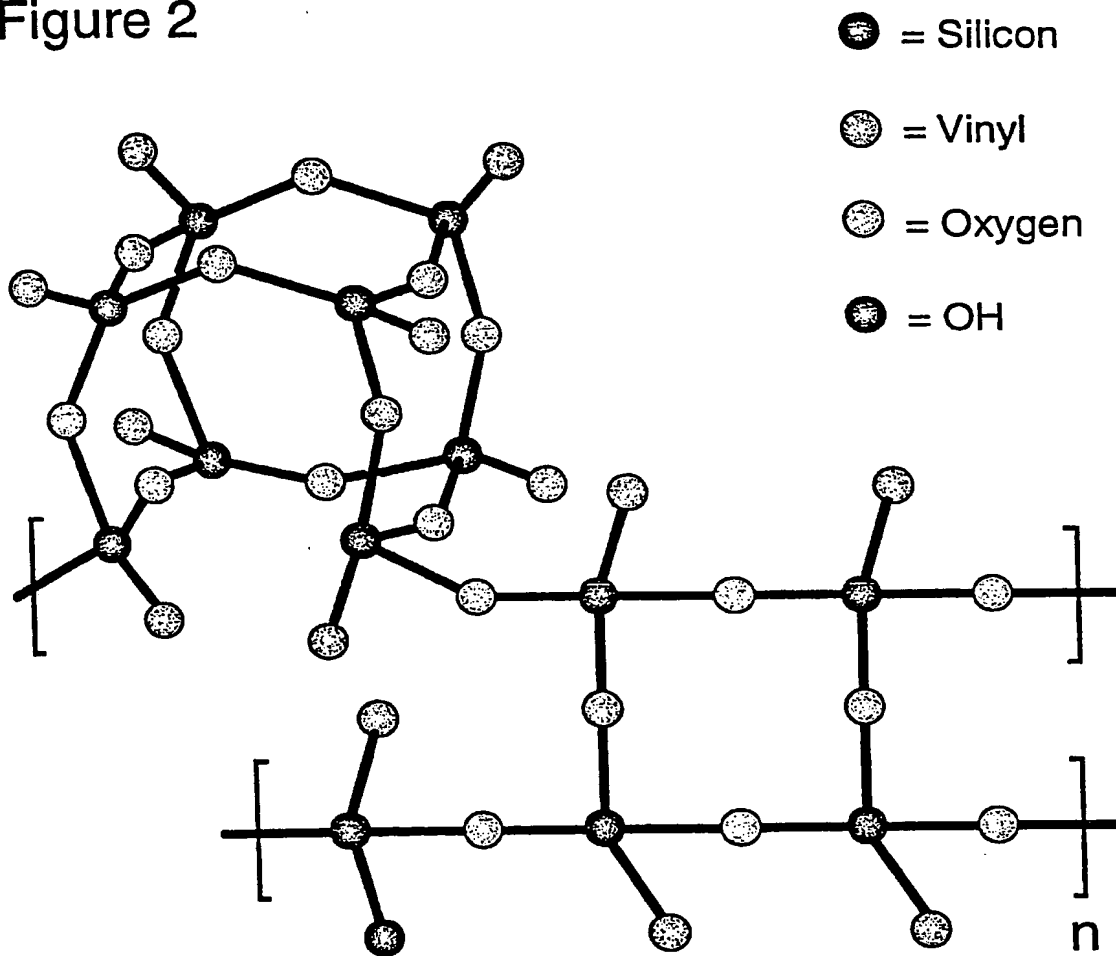


Figure 3

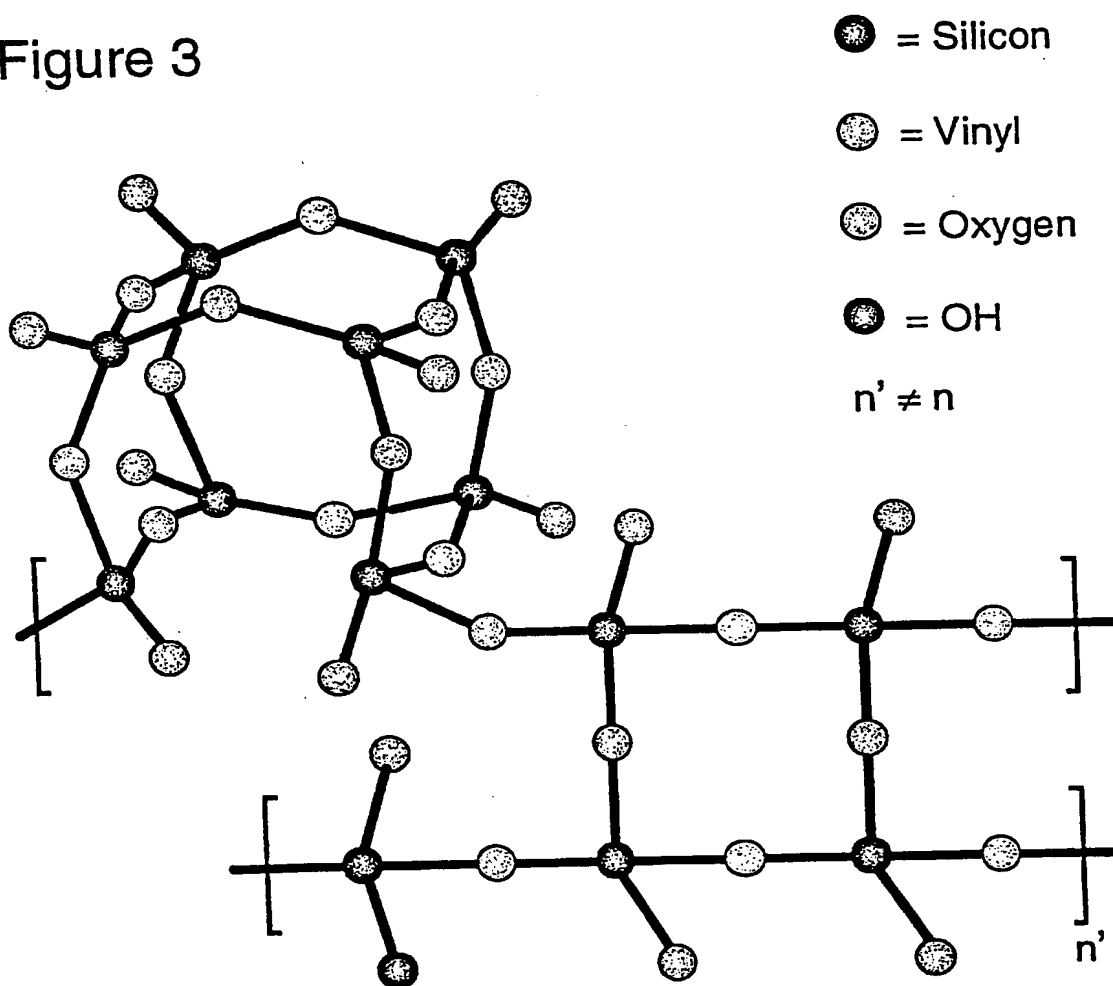

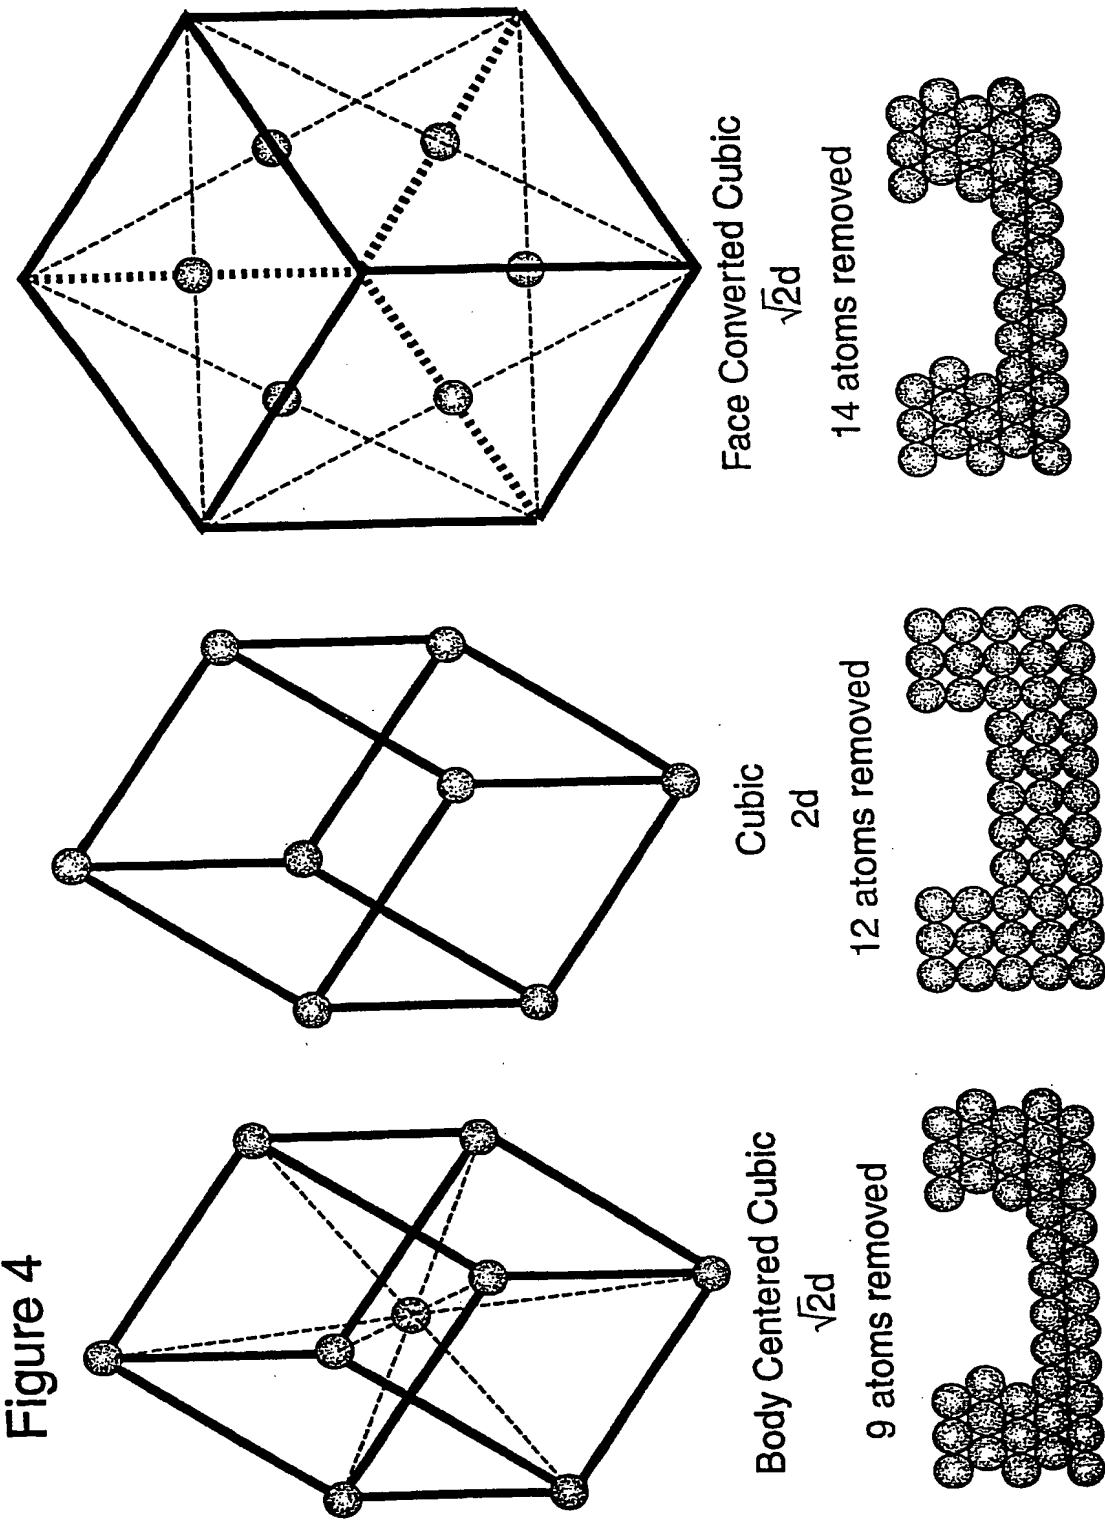

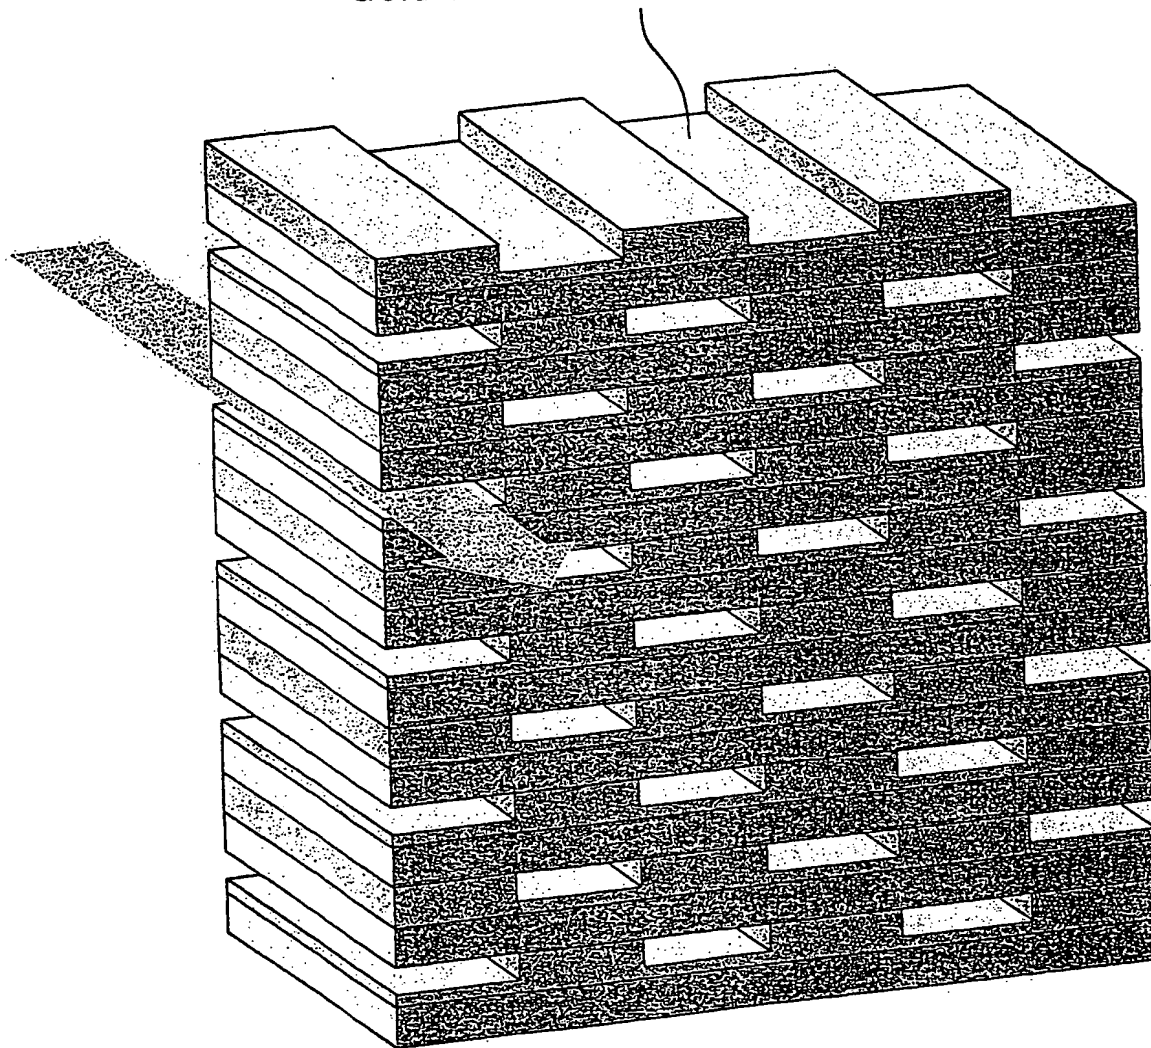



Figure 5

Multi-layered Laser Etched  
Gold Substrait At  $3.7 \text{ \AA}$ Side view of  
the length of  
slots (white)View into the  
end of the  
openings (white)

BEST AVAILABLE COPY

Multi-layered Laser Etched  
Gold Substrait At 3.46 +5%

Figure 6

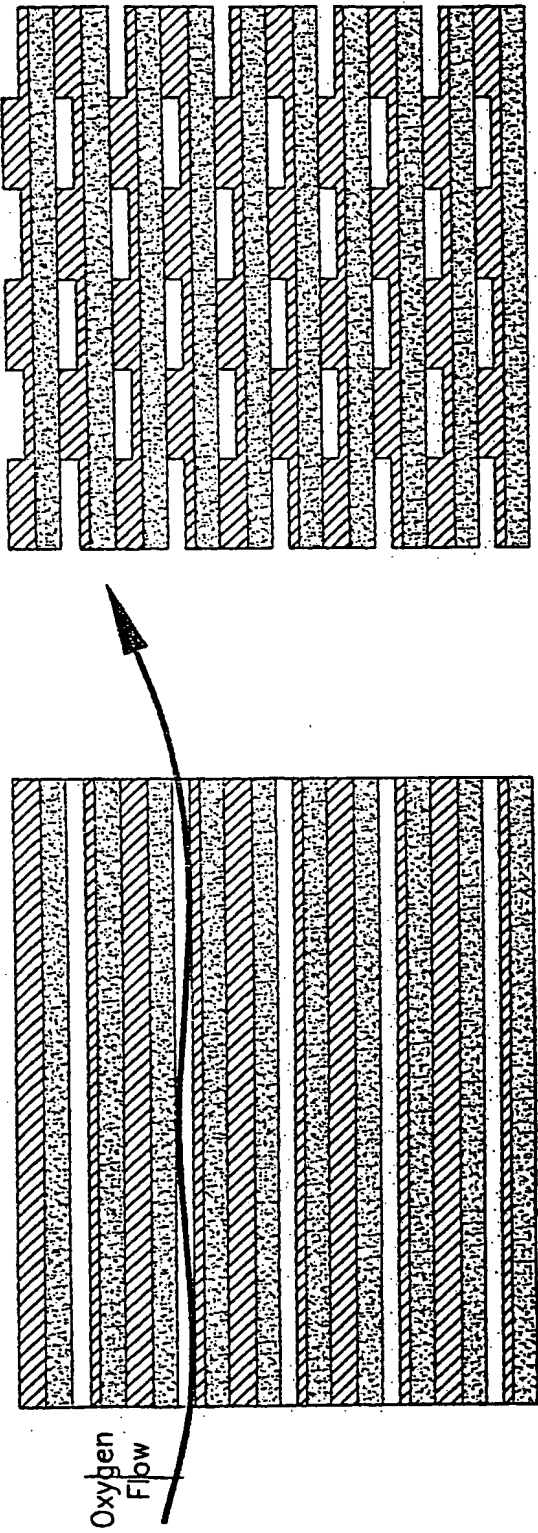

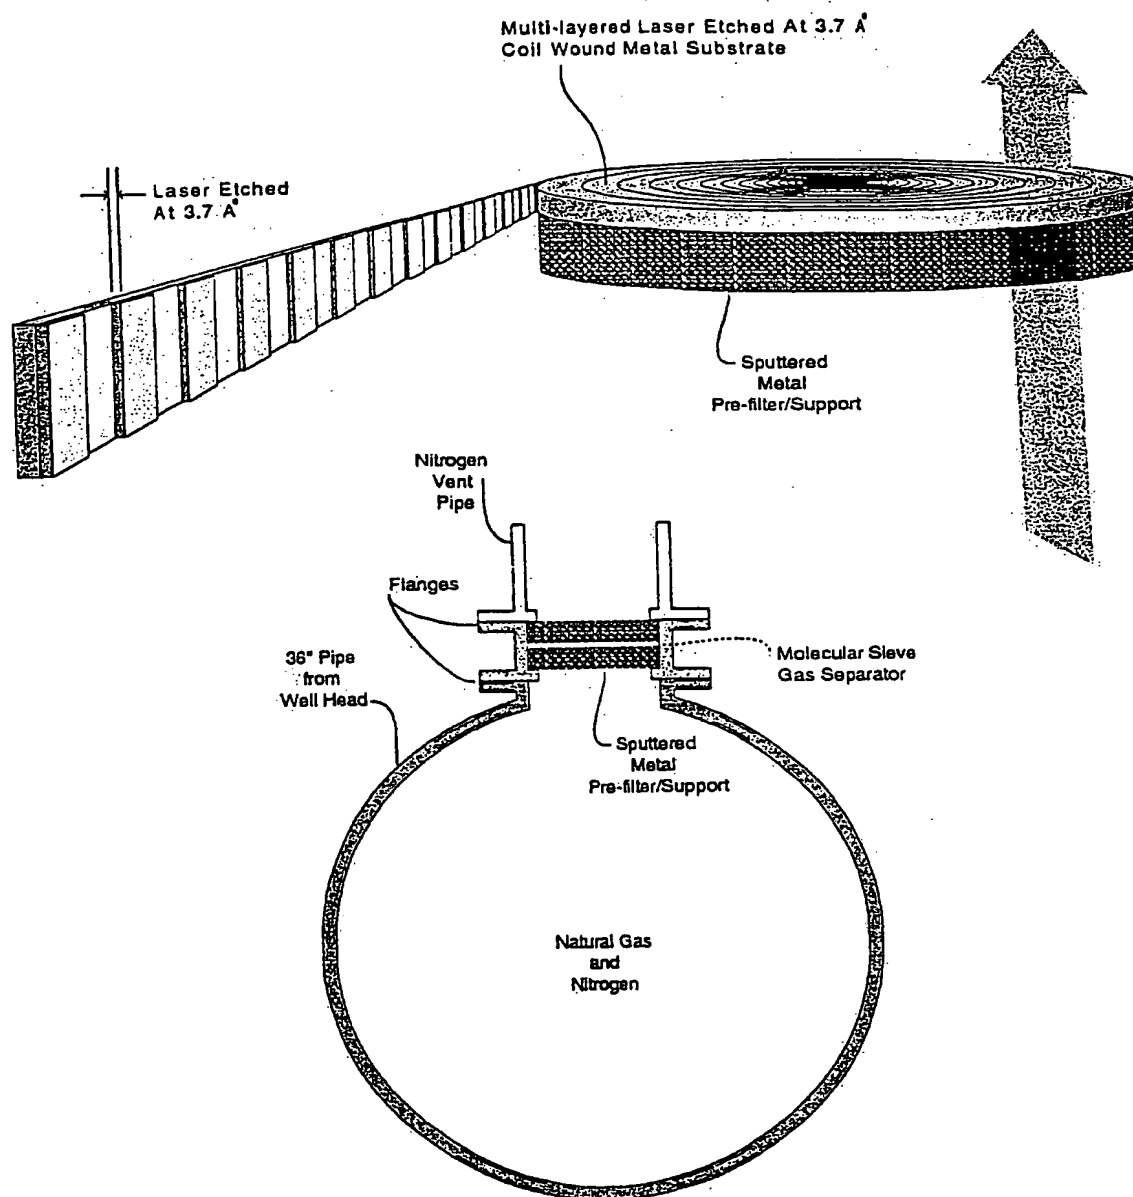
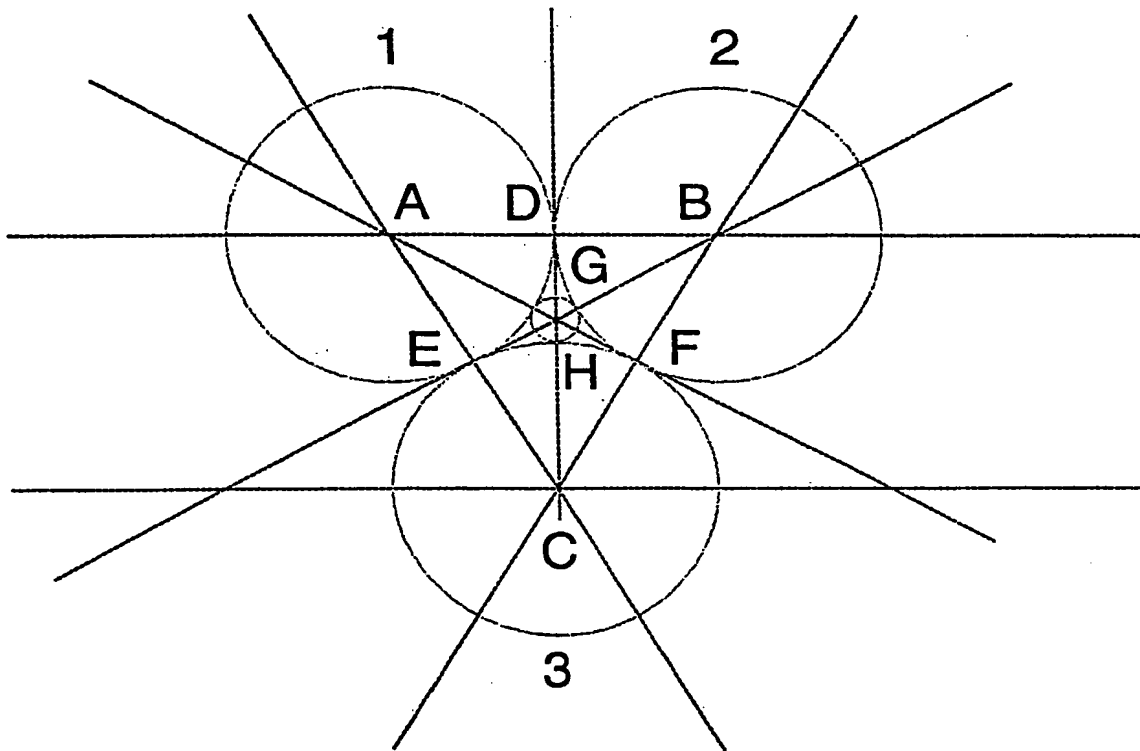
**Figure 7****Coil Wound Molecular Sieve and Nitrogen Collector**

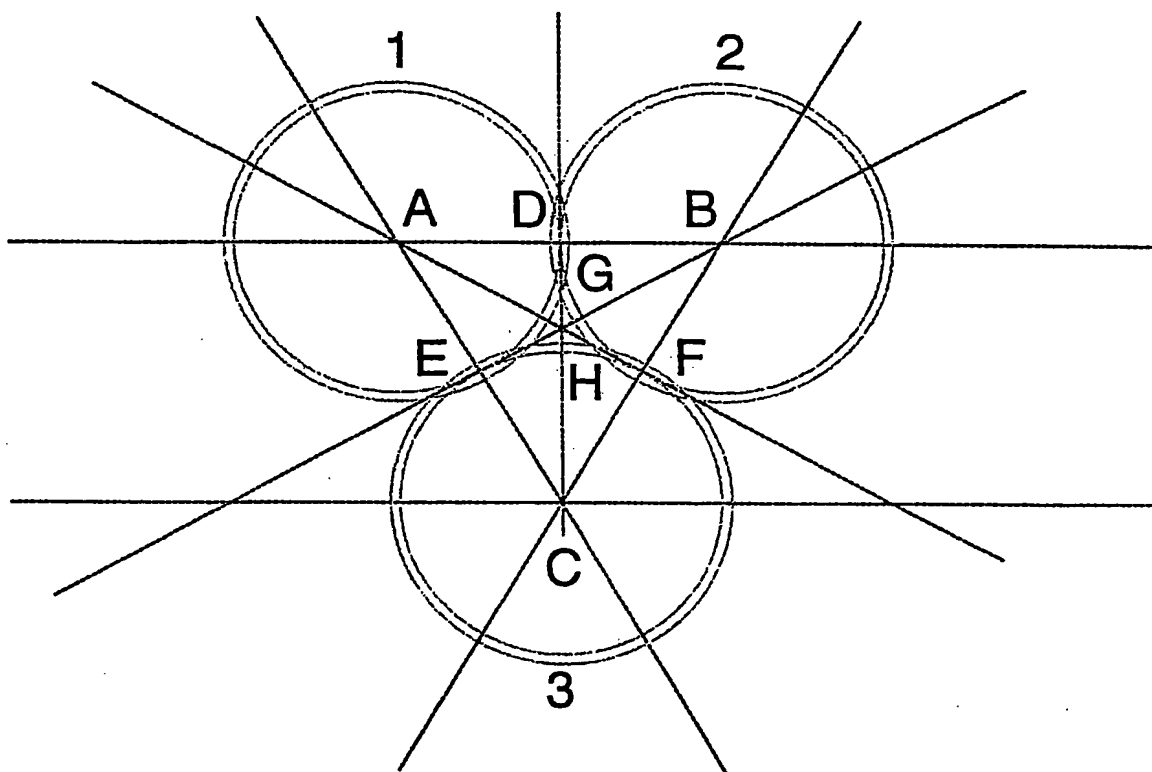


Figure 8



Non Compressed

Figure 9



Compressed

# INTERNATIONAL SEARCH REPORT

Int. Patent Application No.  
PCT/US 00/15778

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 B01D53/22 B01D69/02 B01D71/70 B01D71/02 B01D67/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 B01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 30318 A (FISCHER WALTER M ;GIN DOUGLAS L (US); DENG HAI (US); GRAY DAVID (U) 16 July 1998 (1998-07-16) claims 35,43,55,57 ---	1,2,4
X	WO 98 41566 A (FURUKAWA NOBUYUKI ;NIPPON STEEL CORP (JP); TERAMOTO TAKERO (JP); F) 24 September 1998 (1998-09-24) ---	1
A	& EP 9 967 237 A (NIPPON STEEL CORP) 29 December 1999 (1999-12-29) page 15, line 20 - line 31; claim 1 ---	6,7
X	US 5 710 187 A (STECKLE JR WARREN P ET AL) 20 January 1998 (1998-01-20) column 2, line 31 - line 47; claims 1,6 ---	1,2
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

11 October 2000

Date of mailing of the international search report

18/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Faria, C

# INTERNATIONAL SEARCH REPORT

Int. Application No.  
PCT/US 00/15778

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 008, no. 156 (C-234), 19 July 1984 (1984-07-19) & JP 59 059222 A (TEIJIN KK), 5 April 1984 (1984-04-05) abstract	1,2,6,7, 11,13, 17,22
X	US 5 453 413 A (EKLUND PETER C) 26 September 1995 (1995-09-26) abstract	1,2
A	WO 95 27556 A (INST GAS TECHNOLOGY) 19 October 1995 (1995-10-19) claim 1	38
X	WO 93 11861 A (MINNESOTA MINING & MFG) 24 June 1993 (1993-06-24) page 4, line 4 - line 24 page 8, line 34 - line 37 page 12, line 20 -page 13, line 8	37

# INTERNATIONAL SEARCH REPORT

Information on patent family members

In International Application No  
PCT/US 00/15778

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9830318 A	16-07-1998	US 5849215 A AU 6945698 A	15-12-1998 03-08-1998
WO 9841566 A	24-09-1998	JP 10251407 A EP 0967237 A	22-09-1998 29-12-1999
US 5710187 A	20-01-1998	US 5629353 A	13-05-1997
JP 59059222 A	05-04-1984	NONE	
US 5453413 A	26-09-1995	NONE	
WO 9527556 A	19-10-1995	AU 2381195 A CA 2187330 A	30-10-1995 19-10-1995
WO 9311861 A	24-06-1993	AU 3125693 A CA 2124084 A EP 0624114 A JP 7501988 T US 5308180 A	19-07-1993 24-06-1993 17-11-1994 02-03-1995 03-05-1994